


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

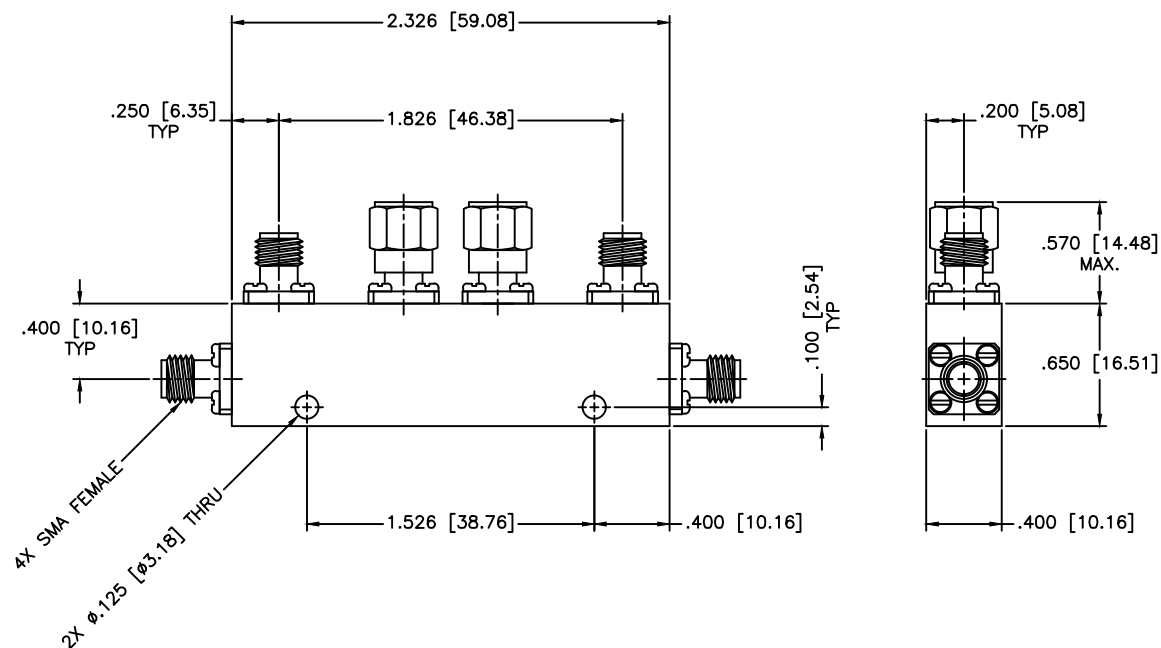

SPECIFICATIONS

Frequency Range: 2–4 GHz
 VSWR: 1.20:1 Max.
 Insertion loss: 0.4dB Max.
 Directivity: 20dB Max.
 Freq Sensitivity: ± 0.85 dB
 Coupling: 30 ± 1.25 dB
 Power: 50W, 3kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		DUAL DIRECTIONAL COUPLER			
DRAWN:		DATE:		PART NO.	
Paiboon Luekhamhan		11-23-1997		DC3-30	
APPROVED:		DATE:		CAGE CODE:	SIZE: A
T. Nguyen		11-23-1997		OD2L5	REV: N/A
		PROCEEDURE NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO.	
		THIRD ANGLE PROJECTION 		80615	
				DO NOT SCALE THE DRAWING	