


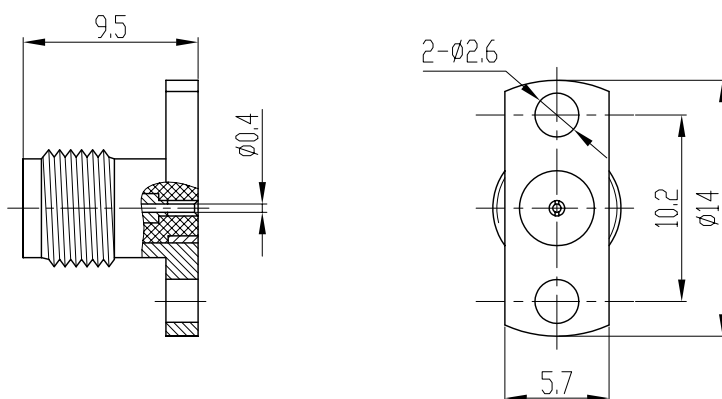

产品型号 type	备注 remark
SMA-KFD337G	mate pin(适配插针 $\phi 0.4^{+0.01}_{-0.02}$)

Electrical Characteristics:

1. Characteristic Impedance: 50Ω
2. Frequency range: DC~18GHz
3. Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 5.0 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1000V
6. Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

1. Center contact :
Female: beryllium, gold plated
2. Body: stainless steel, passivation
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: 50Ω
2. 频率范围: DC~18GHz
3. 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 5.0 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1000V
6. 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 不锈钢, 钝化
3. 绝缘子: 聚四氟乙烯

 		SCALE		SMA-KFD337G RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1			
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		
DRAWN					
CHECKED					
APPROVED					