


SMN7111-F1A

50 kHz to 1 GHz

Surface Mount Noise Sources

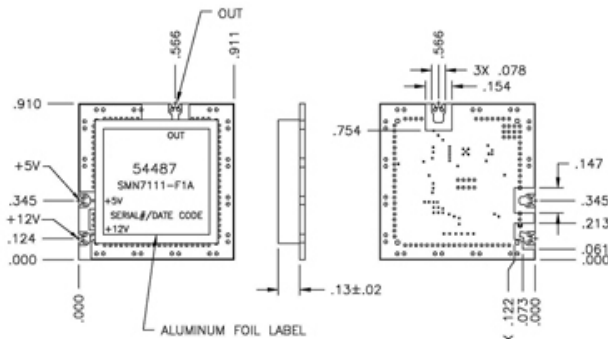

Specifications

RF Frequency	50 kHz to 1 GHz
Noise Spectral Density (N_0)	-119 dBm/Hz Min

Package and Connectivity

Construction	SMT 0.50 inch sq
--------------	------------------

Environmental

Operating Temperature	-40 to 85 °C
Storage Temperature	-55 to 125 °C

Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Hudson, NH | (603) 546-4100 | rf.mrcy.com
Specifications subject to change without notice

