

Ceramic

Frequency Mixer WIDE BAND

MCA1T-113H+

Level 17 (LO Power+17 dBm) 3800 to 11000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
RF Power	50 mW
IF Current	40 mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9


Outline Drawing

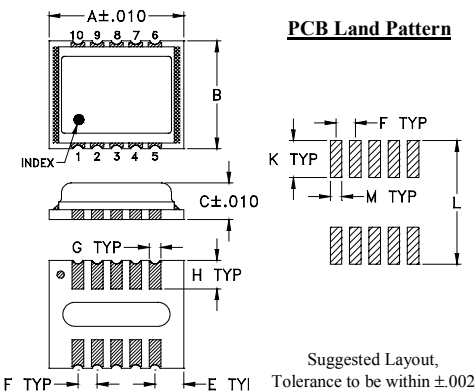

Outline Dimensions (inch)

A	B	C	E	F	G
.350	.280	.095	.075	.050	.030
8.89	7.11	2.41	1.91	1.27	0.76
H	K	L	M		
.074	.096	.321	.030	wt	
1.88	2.44	8.15	0.76	grams	0.21

Demo Board MCL P/N: TB-493+ Suggested PCB Layout (PL-288)

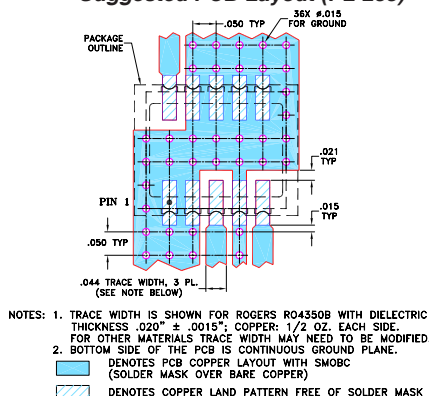

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wide bandwidth, 3800 to 11000 MHz
- low conversion loss, 6.8 dB typ.
- high L-R isolation, 35 dB typ.
- IF, DC to 1800 MHz
- LTCC double balanced mixer
- low cost
- low profile, 0.095"
- aqueous washable
- protected by US Patent 7,027,795^A, 8,749,989

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication
- federal fixed service

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_L-f_U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
3800-11000	DC-1800								
3800-6500	DC-1800	6.7	0.2	9.0	27	15	13	8	22
6500-9500	DC-1800	6.8	0.2	8.8	35	20	32	20	21
9500-11000	DC-1800	7.5	0.2	9.5	28	18	25	15	21



1 dB COMPR. +14 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.

Typical Performance Data at 25°C

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
3800.00	3830.00	6.02	29.37	12.51	1.96	2.88
4000.00	4030.00	5.58	30.22	13.41	1.75	2.98
4200.00	4230.00	5.30	28.87	12.84	1.59	2.87
4500.00	4530.00	5.24	27.75	12.99	1.34	2.83
4800.00	4830.00	5.38	24.29	12.36	1.10	2.77
5000.00	5030.00	6.19	25.35	11.60	1.47	2.79
5200.00	5230.00	6.94	21.26	11.03	1.68	2.70
5500.00	5530.00	7.86	17.52	10.68	1.48	2.72
5800.00	5830.00	7.81	19.64	15.00	1.61	3.28
6000.00	6030.00	7.19	22.63	19.10	1.83	3.51
6200.00	6230.00	6.86	25.31	23.08	2.04	3.48
6500.00	6530.00	7.18	29.58	29.51	2.23	3.16
6827.00	6857.00	6.54	34.24	34.49	1.61	3.84
8015.00	8045.00	7.07	44.15	35.76	2.45	3.11
8609.00	8639.00	7.39	32.87	39.74	3.88	3.21
9203.00	9233.00	7.31	28.64	39.11	2.08	3.67
9500.00	9530.00	7.15	24.36	35.38	1.90	4.20
10106.00	10136.00	7.28	24.03	18.50	2.17	3.93
10538.00	10568.00	7.63	25.90	21.31	2.09	2.66
11000.00	11030.00	8.60	26.28	22.34	2.22	2.75

Electrical Schematic

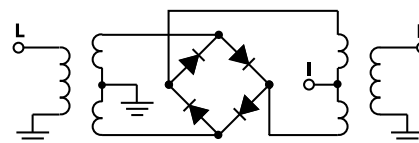

CASE STYLE: DZ885-2

PRICE: \$13.45 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications










www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M130861
MCA1T-113H+
DJ/RS/CP/AM
140626

Performance Charts

MCA1T-113H+

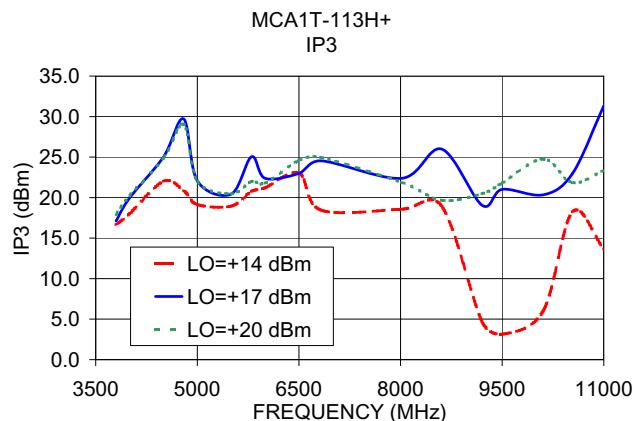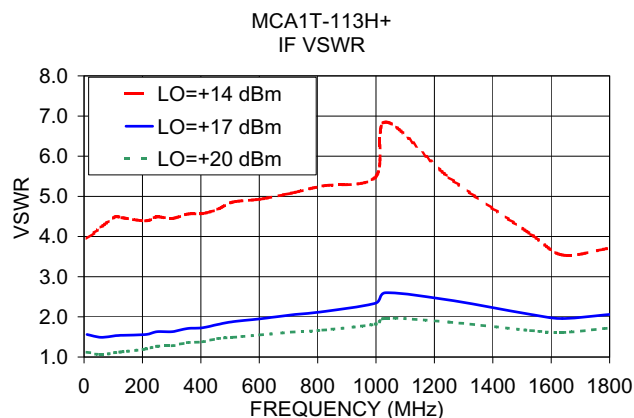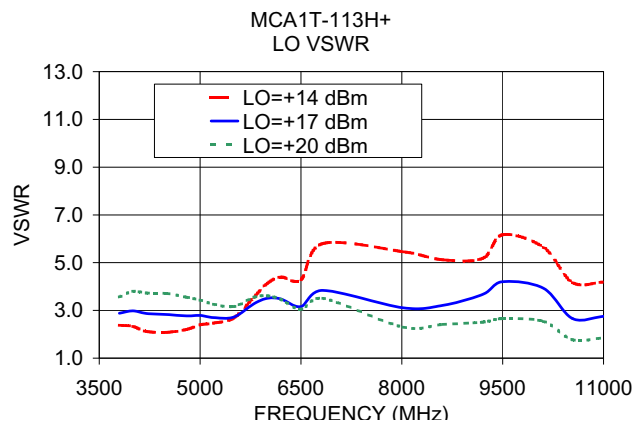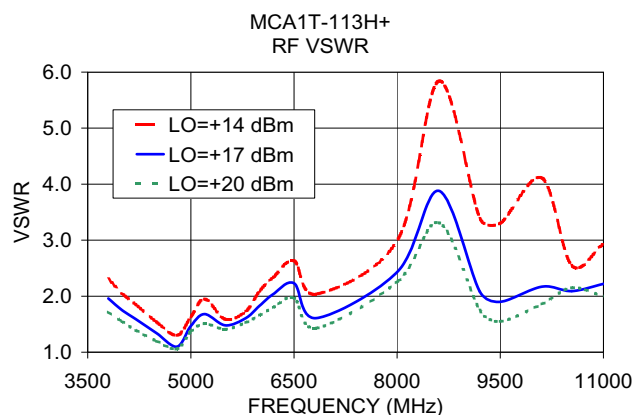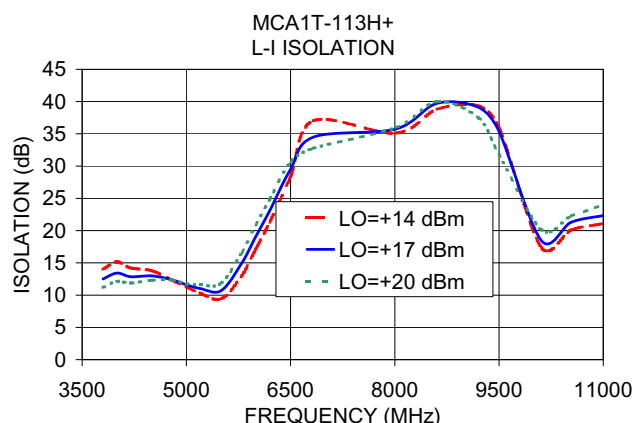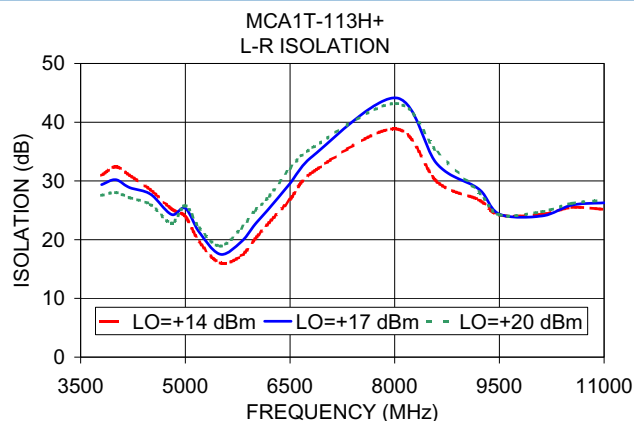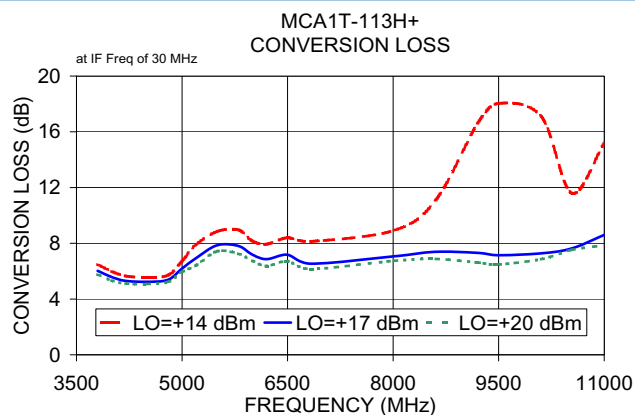

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp

