

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

FREQUENCY RANGE (GHz): DC-2 2-4 4-8 8-12.4 12.4-18

VSWR (Max.): 1.20:1 1.25:1 1.30:1 1.40:1 1.50:1

INSERTION LOSS (dB): 0.20 0.25 0.30 0.40 0.50

ISOLATION (dB): 90 80 80 70 60

MECHANICAL

CONTACT: BREAK BEFORE MAKE

ACTUATOR: LATCHING

SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL

ACTUATOR VOLTAGE: 12.0 Vdc

ACTUATOR CURRENT: 0.110 A MAX @ 12.0 Vdc

POWER HANDLING: 200W CW @ 1.0 GHz

IMPEDANCE: 50 Ohms


ENVIRONMENTAL

OPERATING TEMP: -54° C TO +90° C

SINE VIBRATION: 30 G'S rms

LIFE: 1,000,000 CYCLES

RANDOM VIBRATION: 20 G'S rms

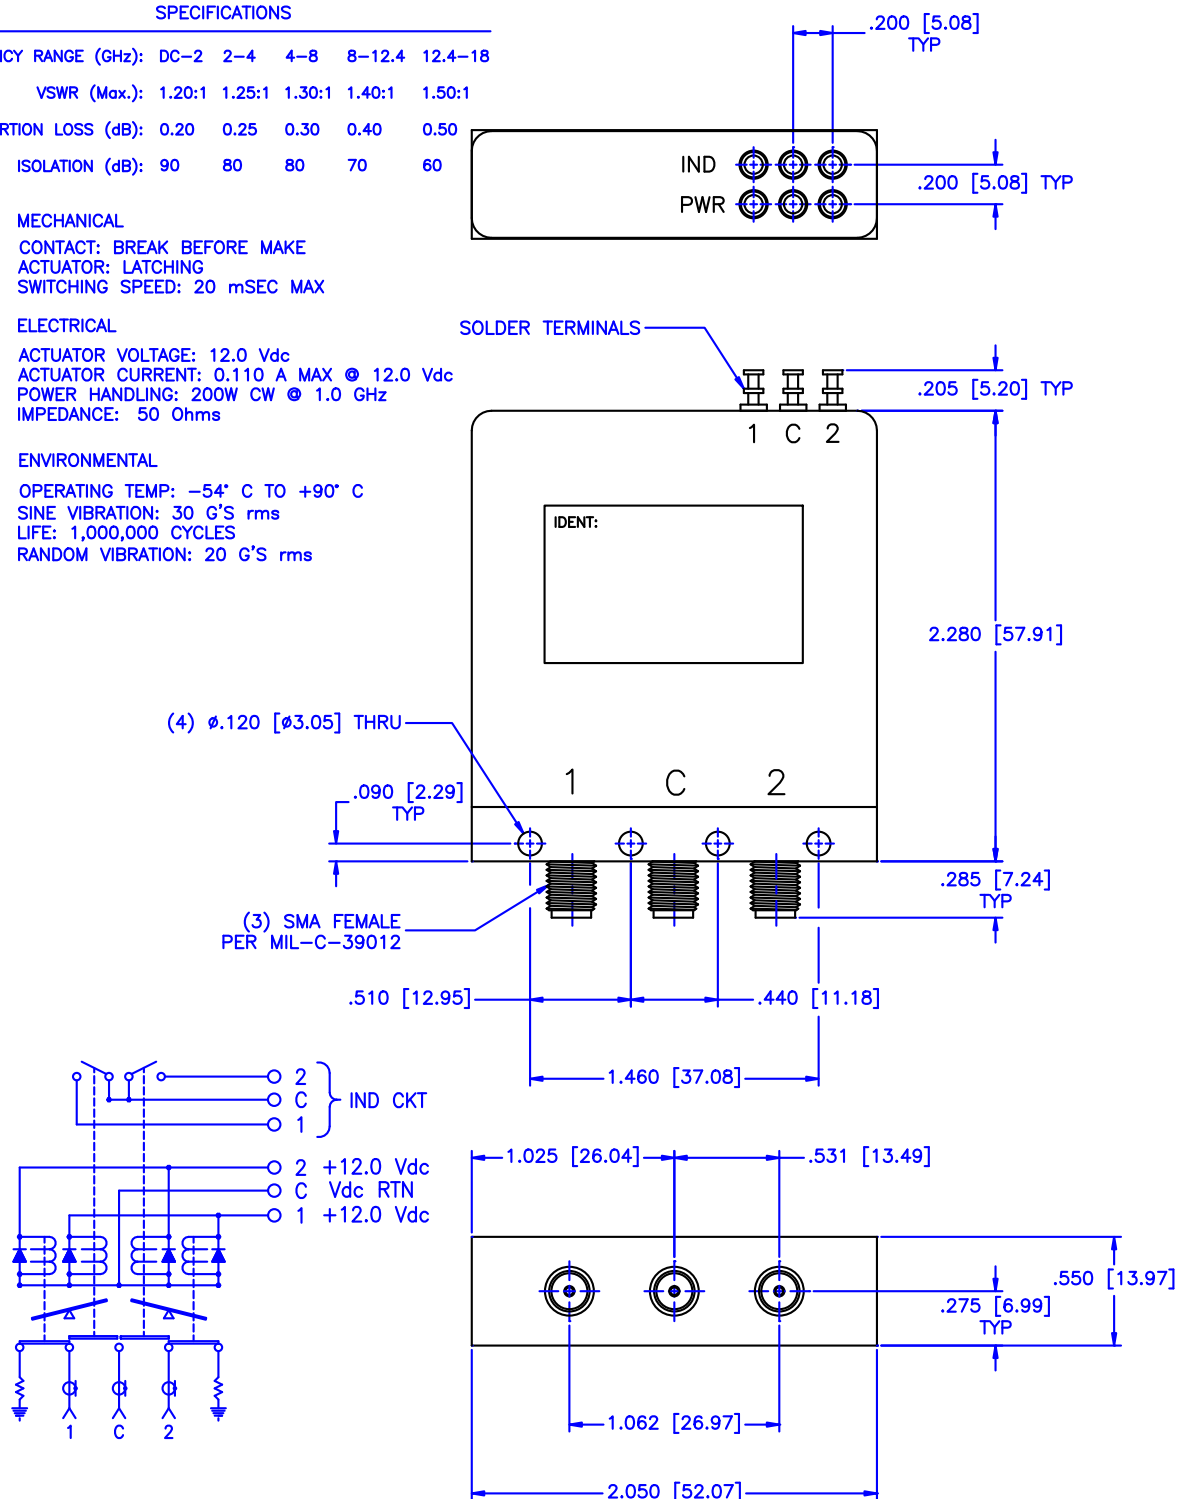

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
DRAWN: Paiboon Luekhamhan		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DATE: 02-23-2006		DRAWING TITLE: ELECTROMECHANICAL SWITCHES		
APPROVED: T. Nguyen		PART NO.: K4-7-LIS/12		
DATE: 02-23-2006		CAGE CODE: OD2L5		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: N/A DWG NO.: 82503		
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		