


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

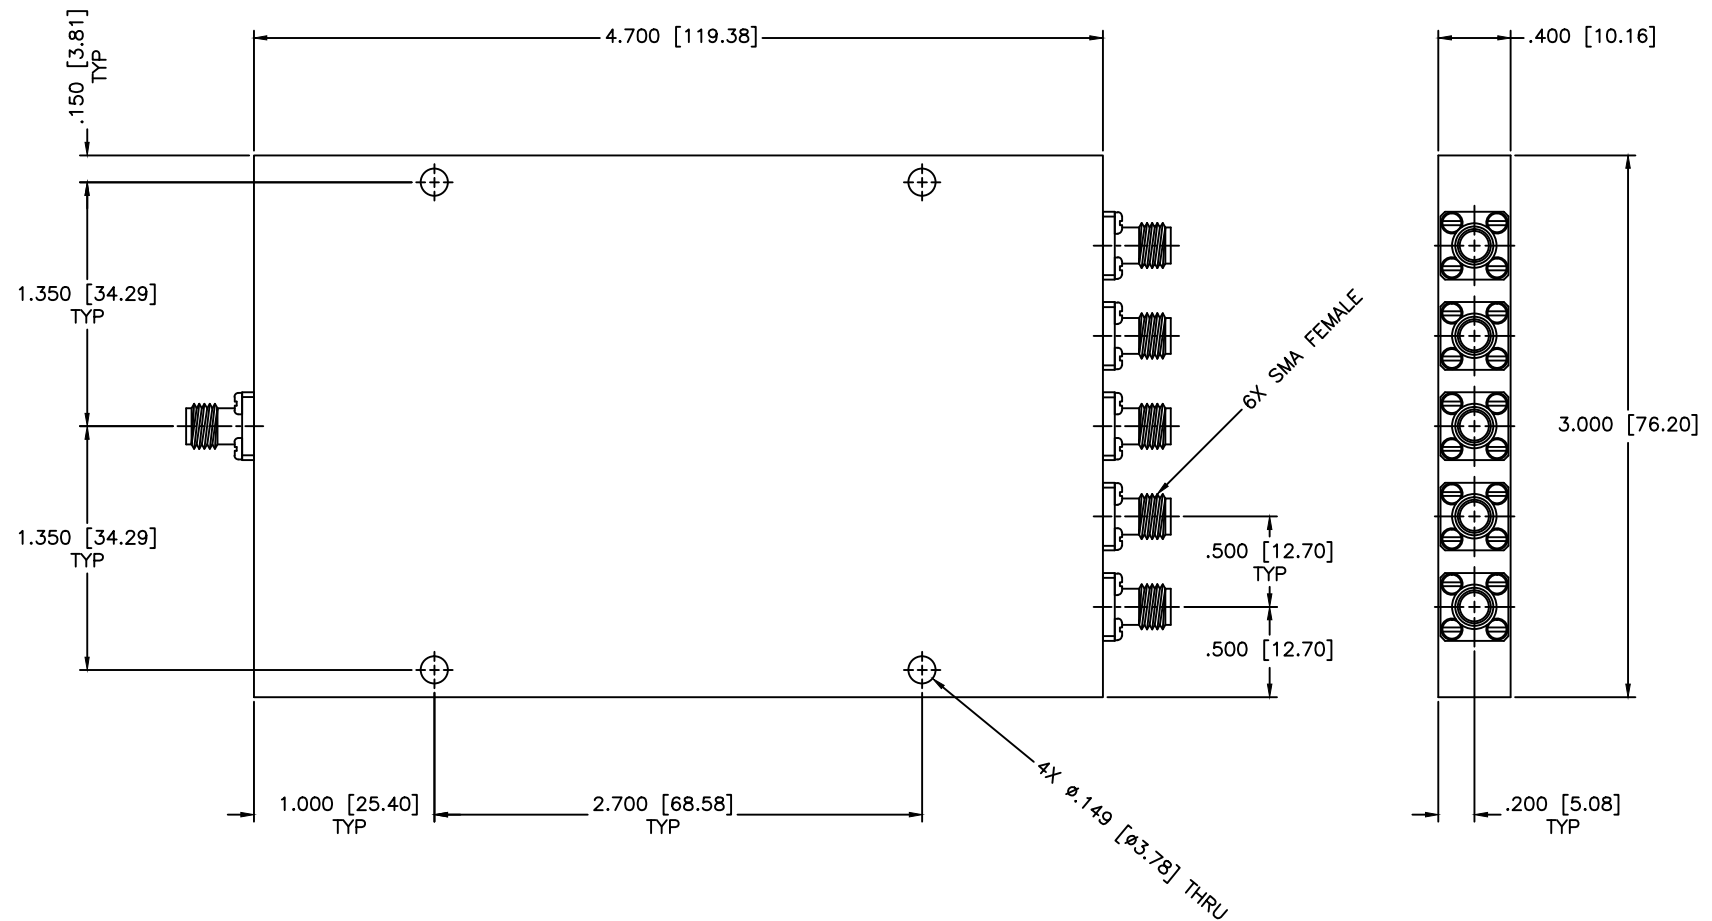

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Insertion Loss: 2.4dB Max.
 Isolation: 15dB Min.
 VSWR Input/Output: 1.60:1 Max.
 Amplitude Balance: ± 1.5 dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 5-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 03-21-1999		PART NO.: PS5-39		
APPROVED: T. Nguyen DATE: 03-21-1999		CAGE CODE: OD2L5	SIZE: A REV: B DWG NO.: 82054	
		DO NOT SCALE THE DRAWING		