

ADAPTERS, BETWEEN-SERIES

Type N / 1.85mm, DC - 18 GHz, Precision

SPECIFICATIONS:

Models: 5242, 5243, 5244, 5245

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18.0 GHz

VSWR _____ 1.25:1 Max.

Impedance _____ 50 Ohms

Operating Temp Range _____ -65°C to +125°C

Mechanical:

Type N Connectors _____ Passivated Stainless Steel

Mates with MIL-STD-348

1.85mm Connectors _____ Passivated Stainless Steel



Mates with 2.4mm & V* Connectors

Conductors _____ Gold Plated Beryllium Copper

*V is a trademark of Anritsu Corp.



Model Number: **5242**
Type N Male to 1.85mm Male

Model Number: **5244**
Type N Male to 1.85mm Female

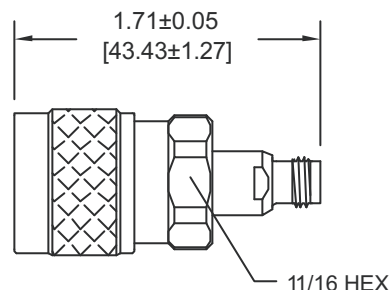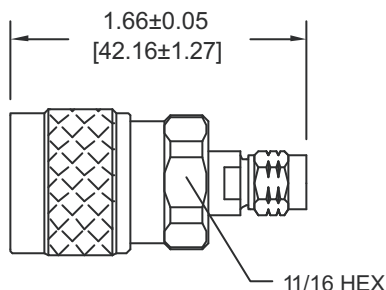

Model Number: **5243**
Type N Female to 1.85mm Male

Model Number: **5245**
Type N Female to 1.85mm Female

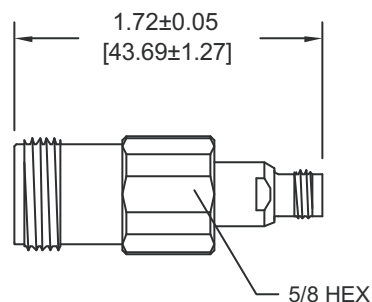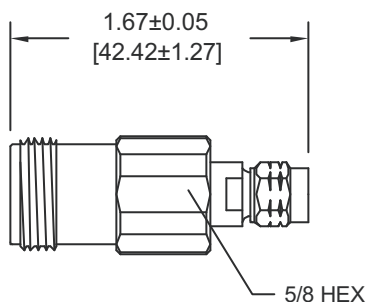

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5242: REV A

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com