



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

WiFi Cavity Bandpass Filter

Part Number: AB2016B693



Electrical specifications

Center Frequency: 2016.5 MHz
Bandwidth: 20 MHz
50 dB Bandwidth: 40 MHz
Input / Output Impedance: 50 Ohms
Passband: 2006.5-2026.5 MHz
Passband Insertion Loss: 3 dB max
Passband Ripple: 1.5 dB max
Passband Return Loss: >15 dB
Rejection: > 50dB @ 1996.5 MHz
Rejection 2: > 50dB @ 2036.5 MHz
VSWR (Input and Output): 1.5:1
Power Handling: 50 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA (F)
Dimensions: 10.07" X 1.5" X 0.76"

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

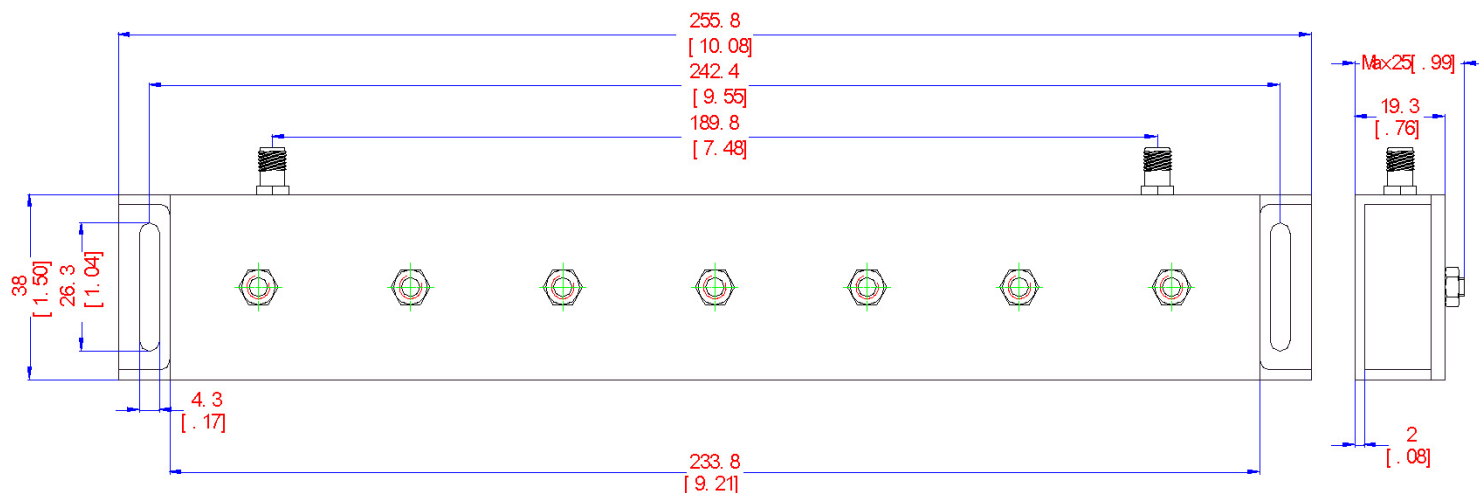



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

WiFi Cavity Bandpass Filter

Part Number: AB2016B693



Response Plot:

