


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

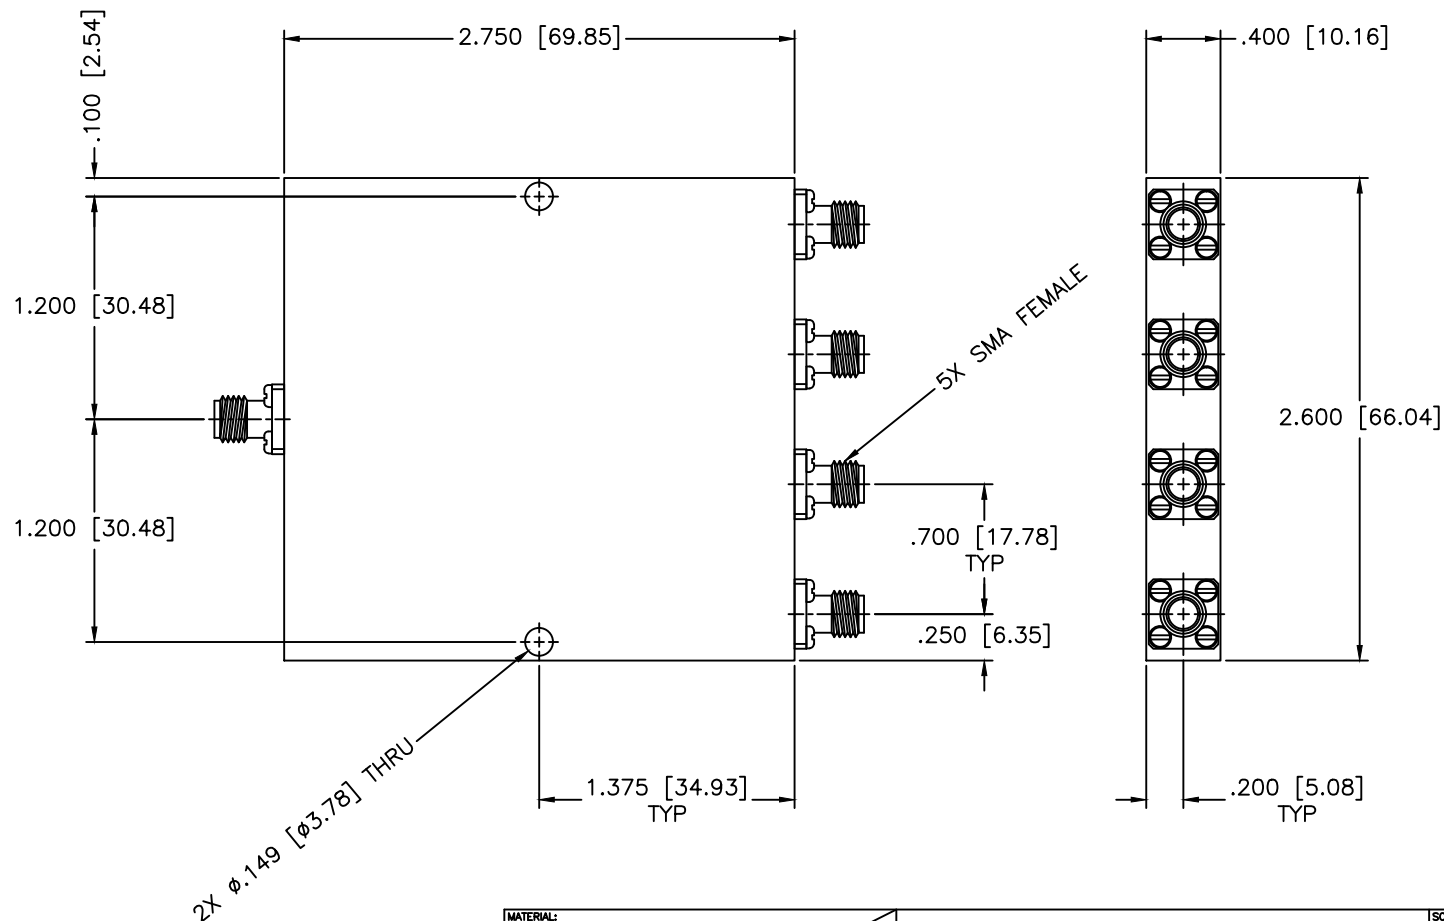

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 0.9dB Min.
 Isolation: 20dB Min.
 VSWR In/Out: 1.45:1/1.30:1 Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		
PART NO.		PS4-3		
DRAWN: Paiboon Luekhamhan	DATE: 03-14-2000	CAGE CODE: OD2L5		SIZE: N/A
APPROVED: T. Nguyen	DATE: 03-14-2000	REV: A		DWG NO. 80174
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		