

Solid State Broadband High Power Amplifier

1067 - BBM0A3KEL

0.01 – 500 MHz / 25 Watts

The BBM0A3KEL (SKU 1067) is suitable for high power ultra broadband or band specific linear applications. This amplifier utilizes push-pull MOSFET power devices that provide high gain, wide dynamic range, low distortions and good linearity. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state Class A linear design
- Instantaneous ultra broadband
- Small and lightweight
- Suitable for CW, AM, and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness



Shown with Option 072

ELECTRICAL SPECIFICATIONS @ +28V_{DC}, 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	0.01		500	MHz
Output Power CW	P _{SAT}	25	30		Watt
Output Power @ 1dB Gain Compression	P _{1dB}	15	20		Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	44			dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Small Signal Gain Flatness	ΔG		±1.0	±2.0	dB
Gain Adjustment Range	VVA	25	30		dB
Input Return Loss	S ₁₁			10	dB
Noise Figure	NF		7	10	dB
Third Order Intercept Point 2-Tone @ 33dBm/Tone, 100kHz Spacing	IP3		+51		dBm
Harmonics @ P _{OUT} = 15W	H		-20		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage	V _{DC}	26	28	30	Volt
Current Consumption @ P _{OUT} = 25W	I _{DD}		4.0	6.0	Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions (L x W x H)	7.0 X 5.0 X 1.25	Inch	Max
Weight	3.0	lb.	Max
RF Connectors Input/Output	Type-SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _C	0		+50	°C
Storage Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 541.5/516.5 – Proc I	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

1067 - BBM0A3KEL

0.01 – 500 MHz / 25 Watts


LIMITS

Input RF drive level without damage	+10 dBm	Max
Load VSWR @ $P_{OUT} = 15W$	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

DC INTERFACE CONNECTOR – D-Sub 9-Pin, Male

Pin #	Description	Specifications
1	N/C	No Connection
2	Current Monitor	Analog voltage relative to I_{DD} @ 50mV/100mA
3	Temp. Sensor	Analog voltage relative to Module's Temperature @ 10mV/°C
4	VVA	VVA Control Voltage: Max Gain = $0V_{DC}$, Min Gain = $5V_{DC}$
5	Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)
6	VDD	$+28.0V_{DC} \pm 2.0V$
7	VDD	$+28.0V_{DC} \pm 2.0V$
8	GND	Ground
9	GND	Ground

OUTLINE DRAWING

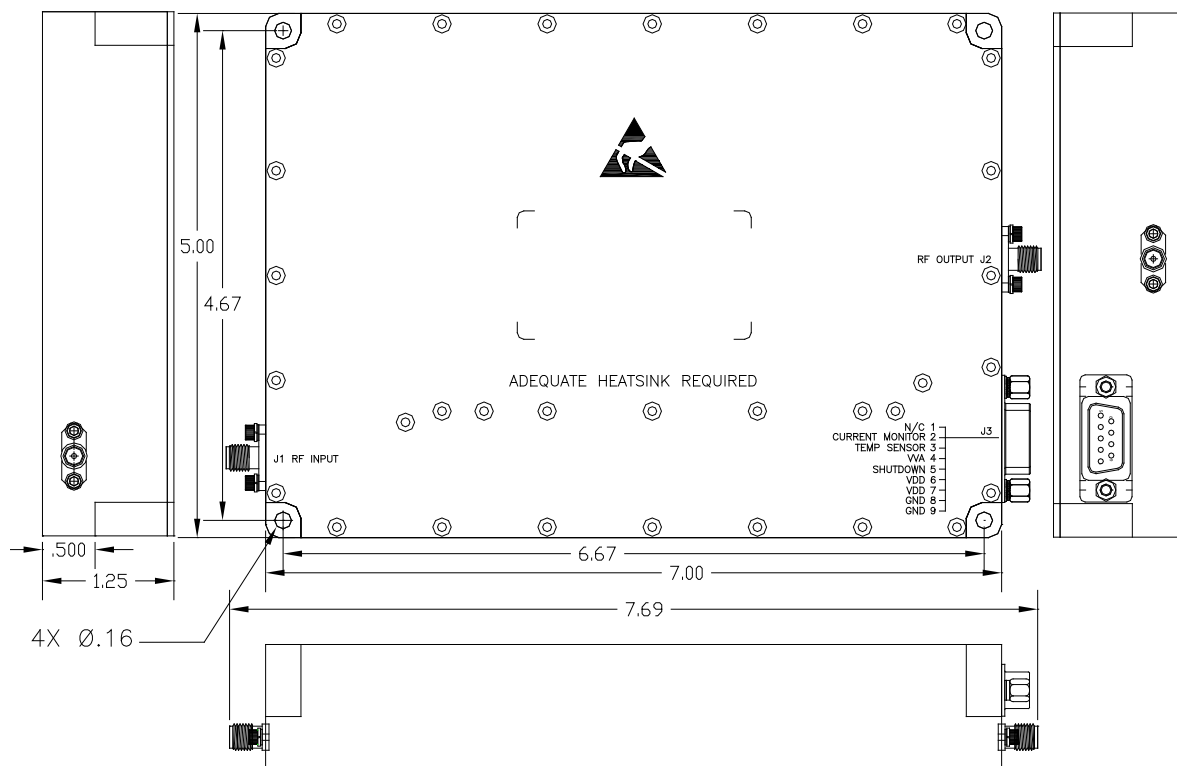

Solid State Broadband High Power Amplifier


1067 - BBM0A3KEL

0.01 – 500 MHz / 25 Watts

TYPICAL PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20\text{dBm}$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -2.0\text{dBm}$
 Reference: 44dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

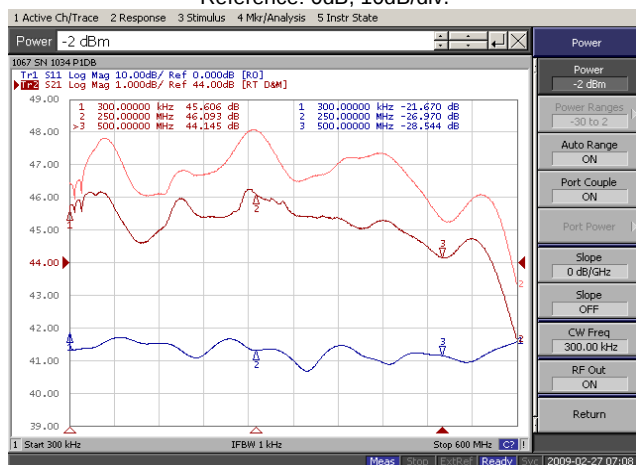

Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20\text{dBm}$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 1.5\text{dBm}$
 Reference: 44dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

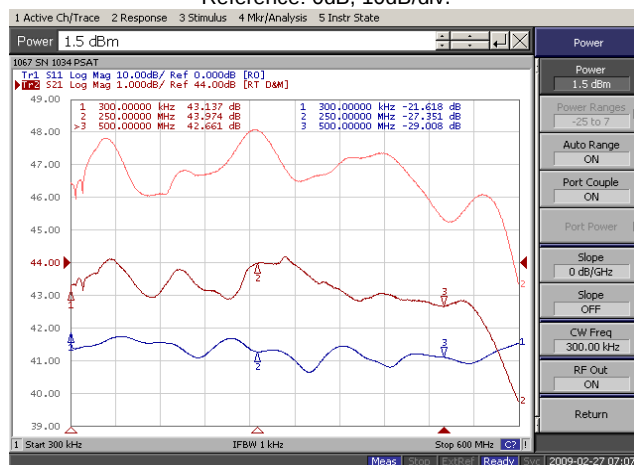

Plot 3 – Gain Adjustment Range

Top Curve: Max. Gain @ $V_{VACTRL} = 5.0\text{V}$, $P_{IN} = -20\text{dBm}$
 Middle Curve: Min. Gain @ $V_{VACTRL} = 0\text{V}$
 Reference: 10dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

