



Model: AT-N800-HD

Description:	Digital Controlled PIN Attenuator
Operating Frequency:	8 - 18 GHz
Insertion Loss (0dB Attn. Ref.):	3.6dB Max
Attenuation Range:	0 - 80dB Nominal Min
Attenuation Flatness:	1.8 dB PK-PK up to 10 dB
	3.2 dB PK-PK up to 20 dB
	4.6 dB PK-PK up to 40 dB
	4.8 dB PK-PK up to 60 dB
	4.6 dB PK-PK up to 80 dB
Control Function:	9 Bit Positive Binary TTL (LSB=0.25 dB, MSB=64dB)
Transfer Function Accuracy:	0 – 0.8 dB ±50% Max
	> 0.8 – 10 dB ±0.40 dB Max
	> 10 - 30 dB ±0.50 dB Max
	> 30 - 50 dB ±0.90 dB Max
	> 50 - 70 dB ±1.35 dB Max
	> 70 - 80 dB ±1.85 dB Max
VSWR (all settings):	1.9:1 Max
Settling Time ("±1dB of Target Setting"):	1µs Max, (5µs<PW<0.1s)
Power Handling:	Operating..... +20 dBm CW/Peak Max
	Survival..... +30 dBm CW/AVG Max
Connectors (RF):	SMA (f), Removable
Connector (Supply & Controls):	15-Pin D-Type Male
Temperature Coefficient (Over Operating Temperature):	±0.025dB/°C Max
Power Supply (internally regulated):	+12 to +15vdc @ 70mA Max
	-12 to -15vdc @ 70mA Max
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ RF Connectors

- B1 [J1 SMA (male)]
- B2 [All SMA (male)]

■ Control Function Resolution

- E1 [LSB = 1/8 dB <> 10-Bits <> "fractional steps"]
- R1 [LSB = 0.1 dB <> 10-Bits <> "decimal steps"]
- E2 [LSB = 1/16 dB <> 11-Bits <> "fractional steps"]
- R2 [LSB = 0.05 dB <> 11-Bits <> "decimal steps"]
- E3 [LSB = 1/32 dB <> 12-Bits <> "fractional steps"]

■ Transfer Functions

- F3 [Inverse Logic ("00...00" = Max Attenuation)]

■ Attenuation <> Limited Range


- G1 [63.875 dB Range <> LSB = 1/8 dB <> 9-Bits]



Model: AT-N800-HD

Outline

("A" = 0.214" [5.4mm] <> Tolerances: ± 0.015 " [0.38mm] <> Weight = 2.4 oz [68g])

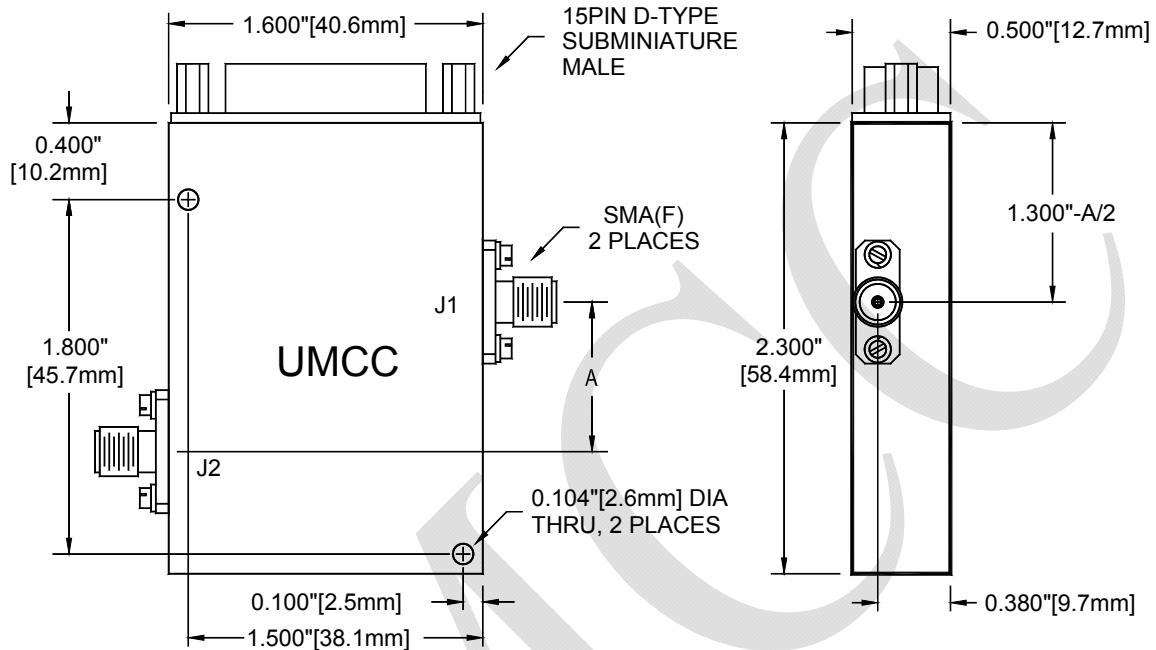

Pin-Out Function

PIN	Function
1	N/C
2	N/C
3	N/C
4	0.25 dB
5	0.5 dB
6	1.0 dB
7	2.0 dB
8	4.0 dB
9	8.0 dB
10	16.0 dB
11	32.0 dB
12	64.0 dB
13	+VDC
14	-VDC
15	GND (Chassis & Digital)

