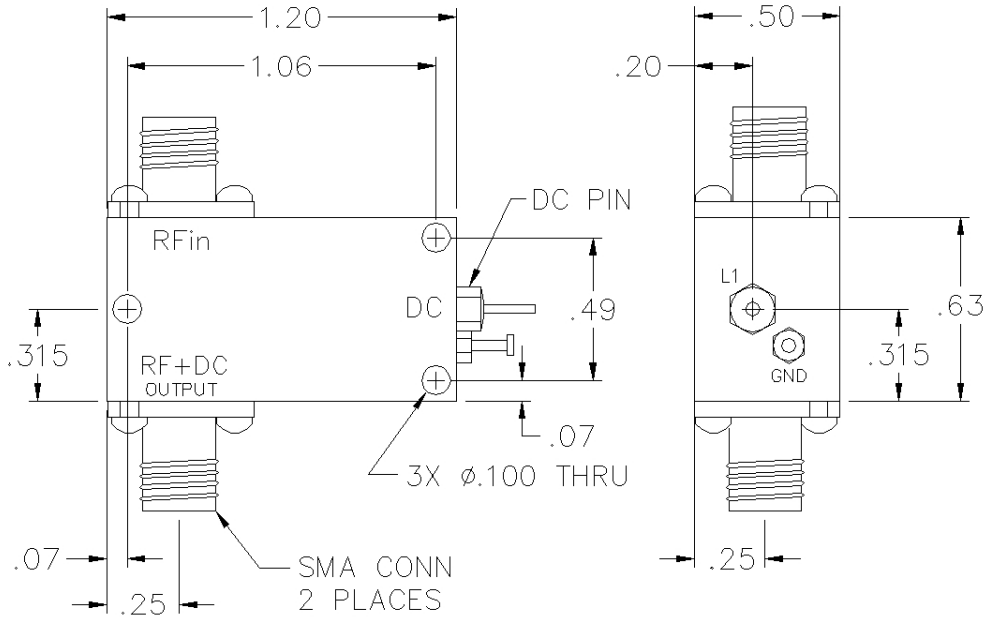

SPECIFICATIONS

Frequency Range:	100 kHz - 12.4 GHz
Isolation:	40 dB Min
Insertion Loss:	1.5 dB Max
Current[1]:	700 mA Max
Power:	1 Watt Max
Voltage:	50 Vdc Max
VSWR:	1.60:1 Max

Notes:

1. Higher current and isolation requirements available.

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
48 INDUSTRIAL WEST, CLIFTON NJ 07012
TEL: 973-779-6262 FAX: 973-779-2727
WWW.PULSARMICROWAVE.COM

DESCRIPTION : Bias Tee

MODEL NO. : BT-52-400D

DIMENSIONS ARE IN INCHES
DECIMAL TOLERANCE:
2 PLACE ± .02
3 PLACE ± .010

SIZE A | CAGE CODE : 0HR85 | REV CODE :

SCALE : N / A | ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME | SHEET 1 OF 1