

WR75 to SMA-F WAVEGUIDE TO COAXIAL ADAPTER M4 MOUNTING THRU HOLES

SMW75AC

SPECIFICATIONS

FREQUENCY: 10-15 GHZ

VSWR: 1.25:1 MAX



MATERIAL BODY: Al/Cu

MATERIAL CONNECTOR:


BODY PASSIVATED STEEL

CONTACTS: BeCu Au PLATED 30μ-in

ROHS COMPLIANT

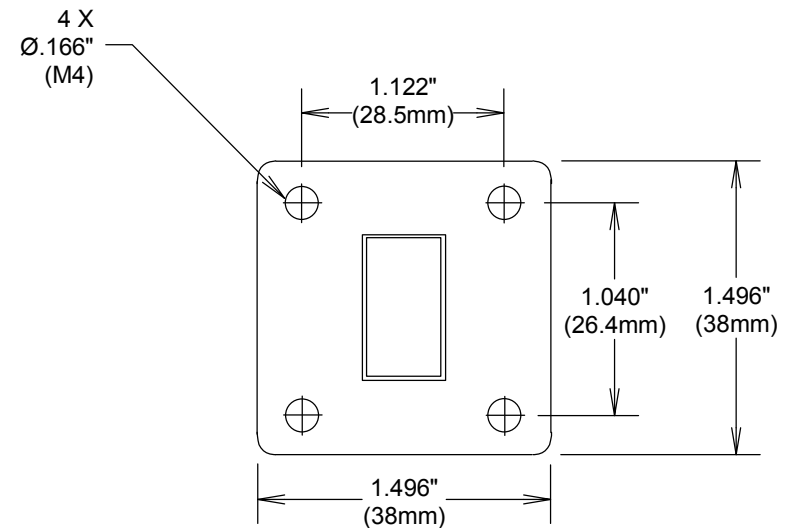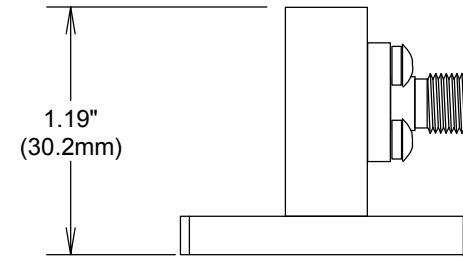

MEASUREMENTS BELOW ARE TYPICAL

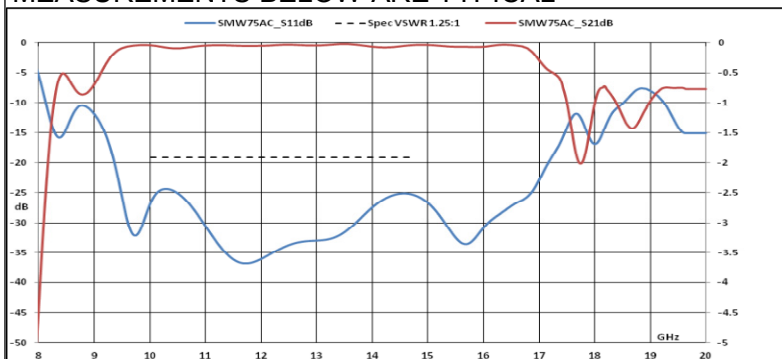

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**WR75 to SMA-F WAVEGUIDE TO
COAXIAL ADAPTER M4 HOLES**

SIZE

A

CAGE CODE

3FKR5

DWG NO

SMW75AC

REV

A

SCALE

SHEET