



50 Ohm SMA Medium Power Noise Source With A Noise Output ENR Of 15.15 dB From 8 GHz to 12 GHz

TECHNICAL DATA SHEET

PE503

50 Ohm SMA Medium Power Noise Source With A Noise Output ENR Of 15.15 dB From 8 GHz to 12 GHz

Configuration

Design	Medium
DC Input Connector	BNC Female
DC Input Impedance	50 Ohms
RF Output Connector	SMA Male

Electrical Specifications

Frequency Range, GHz	8 to 12
Maximum VSWR	1.35:1
Noise Output ENR, dB	15.5
Bias Voltage, Volts	28
Bias Current, mA	25
Rise / Fall Time, μ s	1
Maximum Noise Output vs VDC, db/%V	0.1

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +85
------------------------	------------

Size

Length, in [mm]	3.37 [85.6]
Width/Dia., in [mm]	0.755 [19.18]
Height, in [mm]	0.755 [19.18]

DC Input Connector

Type	BNC Female
------	------------

RF Output Connector

Type	SMA Male
Hex Size, in.	5/16

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Medium Power Noise Source With A Noise Output ENR Of 15.15 dB From 8 GHz to 12 GHz PE8503](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Medium Power Noise Source With A Noise
Output ENR Of 15.15 dB From 8 GHz to 12 GHz

TECHNICAL DATA SHEET

PE8503

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm SMA Medium Power Noise Source With A Noise Output ENR Of 15.15 dB From 8 GHz to 12 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Medium Power Noise Source With A Noise Output ENR Of 15.15 dB From 8 GHz to 12 GHz PE8503](http://www.pasternack.com/50-ohm-sma-noise-source-output-15.15-db-8000-mhz-12000-mhz-pe8503-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-noise-source-output-15.15-db-8000-mhz-12000-mhz-pe8503-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8503 CAD Drawing

50 Ohm SMA Medium Power Noise Source With A Noise
Output ENR Of 15.15 dB From 8 GHz to 12 GHz

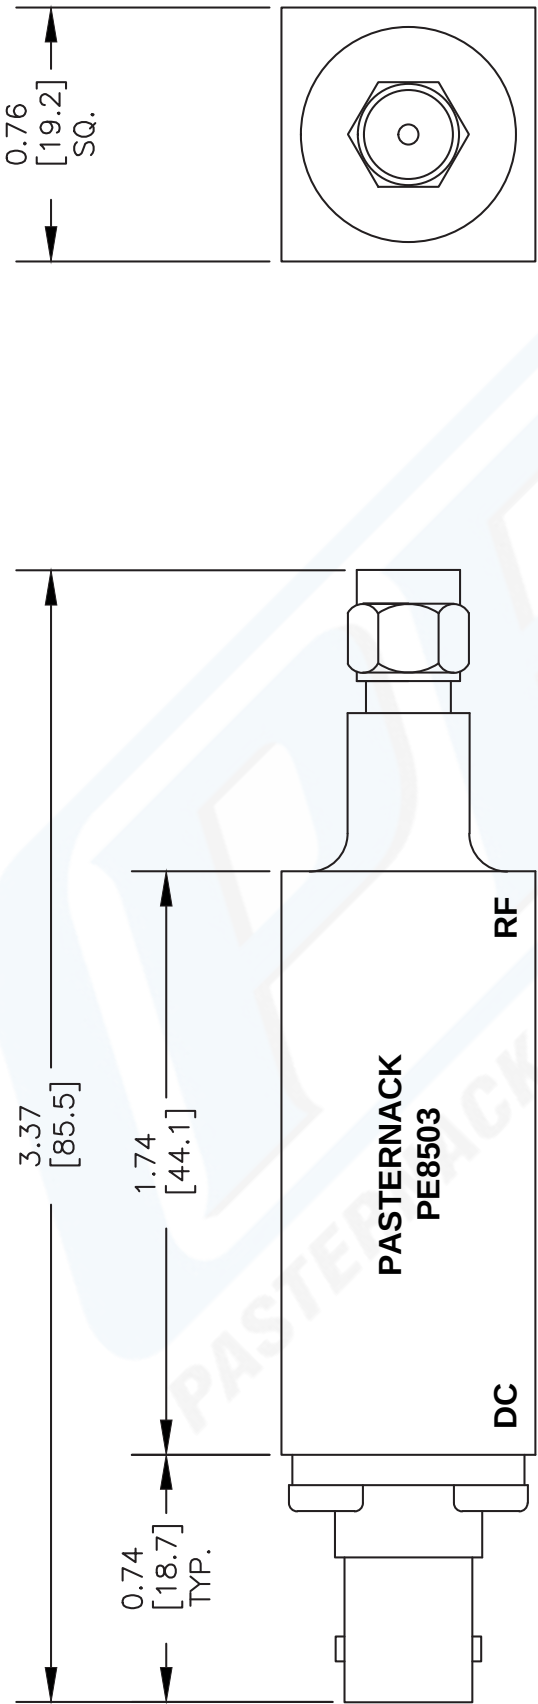

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE503

REV. B

FSCM NO. 53919

CAD FILE

030308-B

SCALE N/A

SIZE A

147



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com