



## SSMA Female Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing

### TECHNICAL DATA SHEET

PE44391

#### SSMA Female Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing

##### Configuration

Connector	SSMA Female
Connector Specification	MIL-C-39012
Connector Interface Type	Thru Hole
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

##### Electrical Specifications

Impedance, Ohms	50
-----------------	----

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

###### Size

Length, in [mm]	0.533 [13.54]
Width/Dia., in [mm]	0.25 [6.35]
Height, in [mm]	0.25 [6.35]
Weight, lbs [g]	0.004 [1.81]

##### Connector

Type	SSMA Female
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

##### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Female Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing PE44391](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SSMA Female Connector Solder Attachment Thru  
Hole PCB, .200 inch x .067 inch Hole Spacing

TECHNICAL DATA SHEET

PE44391

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

SSMA Female Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Female Connector Solder Attachment Thru Hole PCB, .200 inch x .067 inch Hole Spacing PE44391](http://www.pasternack.com/ssma-female-standard-thru-hole-pcb-connector-pe44391-p.aspx)

URL: <http://www.pasternack.com/ssma-female-standard-thru-hole-pcb-connector-pe44391-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44391 CAD Drawing

SSMA Female Connector Solder Attachment Thru Hole  
PCB, .200 inch x .067 inch Hole Spacing

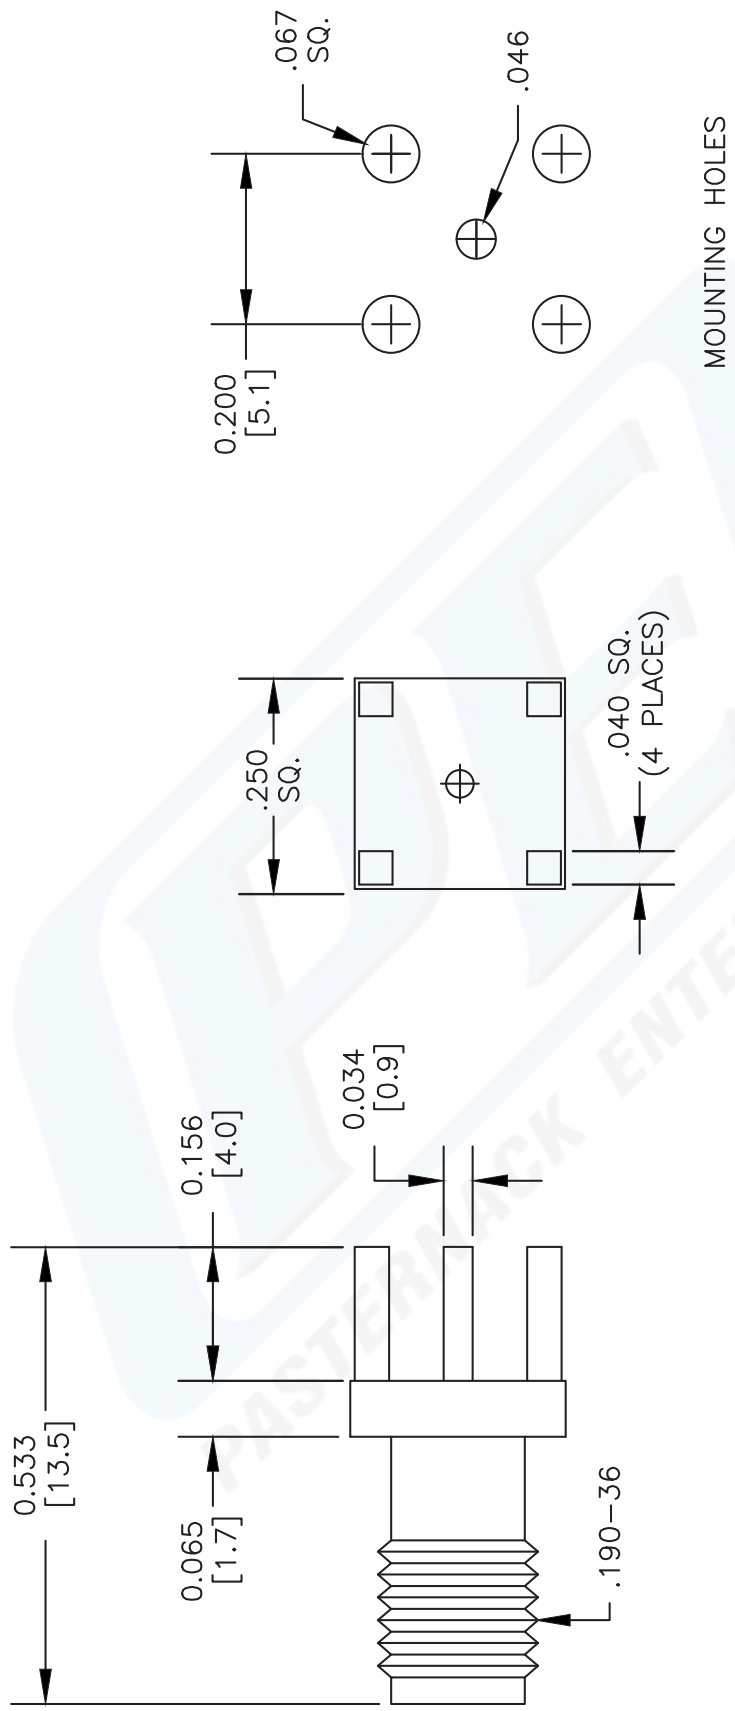

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE44391**

FSCM NO. 53919

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com