

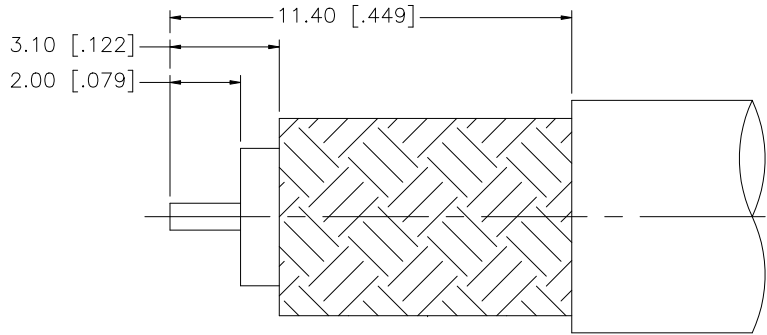
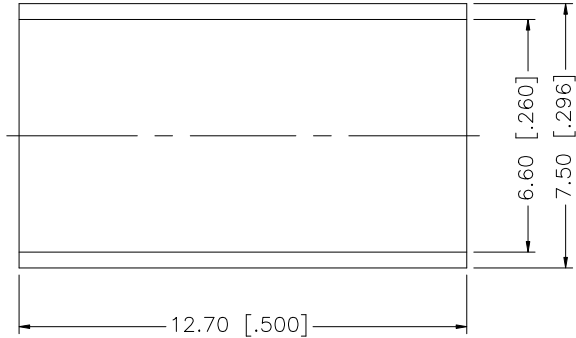


REV.	DATE	DESCRIPTION
NC	08/23/07	INITIAL RELEASE

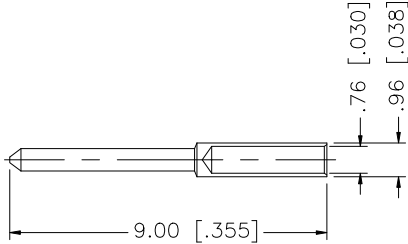

RECOMMENDED CABLE
STRIPPING DIMENSIONS

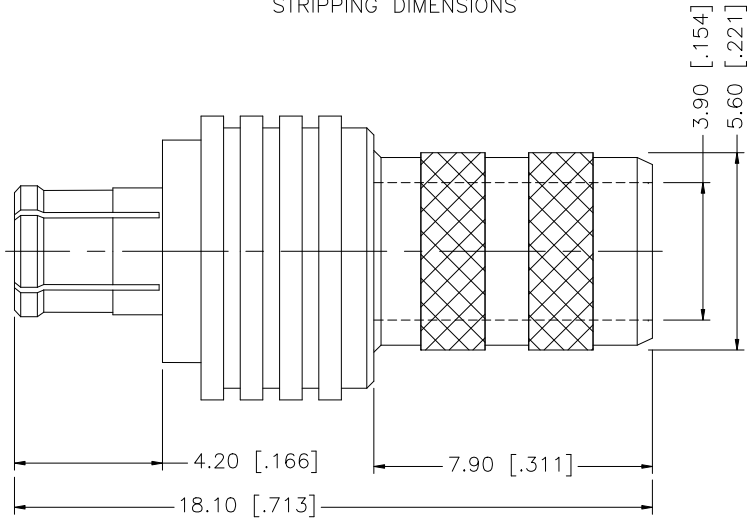

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .255"
 2. CRIMPED CONTACT PIN – SQ. CRIMP SIZE 0.7mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex												
7						DRAWN	G.R.S.						08/23/07							
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION MCX CRIMP PLUG (FOR RG-59/U CABLE)												
5						ISSUED														
4	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	SHEET	1 OF 1	PART NO. 252194-75												
3	CONTACT PIN	BRASS	GOLD	1																
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING			DWG. NO.	252194-75.DWG	REV.	NC	SIZE	A	SCALE	NA					
1	BODY	BER. COPPER	GOLD	1																
DESCRIPTION					MATERIAL		FINISH		QTY											