


NMA2110-CS3

1 MHz to 1000 MHz

Dip Packaged Noise Sources

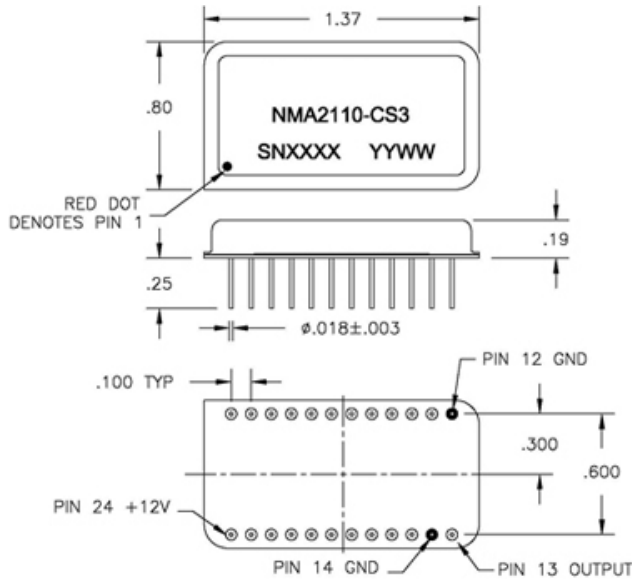

Specifications

RF Frequency	1 MHz to 1000 MHz
Noise Output	81 - 84 dB ENR
Noise Spectral Density (N_0)	-91.5 dBm/Hz
Flatness	2 dB P-P Max
Peak Factor	5:01
Bias Voltage	11.8 to 13 V
Supply Current	125 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	DIP 24 PIN
--------------	------------

Environmental

Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Hudson, NH | (603) 546-4100 | rf.mrcy.com
 Specifications subject to change without notice

