

OUTPUT

Frequency

5.12 GHz

Level

+13 dBm $\pm$ 2 dB into 50 ohms

STABILITY

Aging

1×10^{-6} first year

after 30 days operating, typical

5×10^{-7} second year, typical

3×10^{-7} per year thereafter, typical

Phase Noise L(f), typical

100 Hz -93 dBc/Hz

1 KHz -118 dBc/Hz

10 KHz -135 dBc/Hz

100 KHz -136 dBc/Hz

Temperature Stability

$\pm 5 \times 10^{-7}$, 0° to +50°C (Ref +25°C)

Harmonics

$\leq$ -25 dBc

Sub-Harmonics

$\leq$ -60 dBc

Spurious

$\leq$ -80 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

4.16 x 4 x 1"

Connectors

SMA(f) and solder pins

Packaging

Nickel-plated machined
aluminum housing – J3

Mounting

Threaded inserts on base,
#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

$\leq$ 16.0 Watts for 5 minutes

Total Power

$\leq$ 13.0 Watts at +25°C

Supply Voltage

+15 VDC $\pm$ 5%

ADJUSTMENT

Mechanical Tuning

$\pm 4 \times 10^{-6}$

Electrical Tuning

$\pm 5 \times 10^{-7}$, ± 5 VDC

Negative slope

CRYSTAL

Type

80 MHz SC-cut (x64)

OTHER

Label

Use conventional label with the
following information:

501-25402 (Current Rev.)

5.12 GHz MXO-FR

+15 VDC

Serial # - Date Code

(Mark connectors with function)

Test Data

Output Level

Phase Noise

Temperature Stability


Harmonics, Subs, Spurious

Power – Warm-up and Total

Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	01-26-12	Initial Release	PAC	

J3 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output

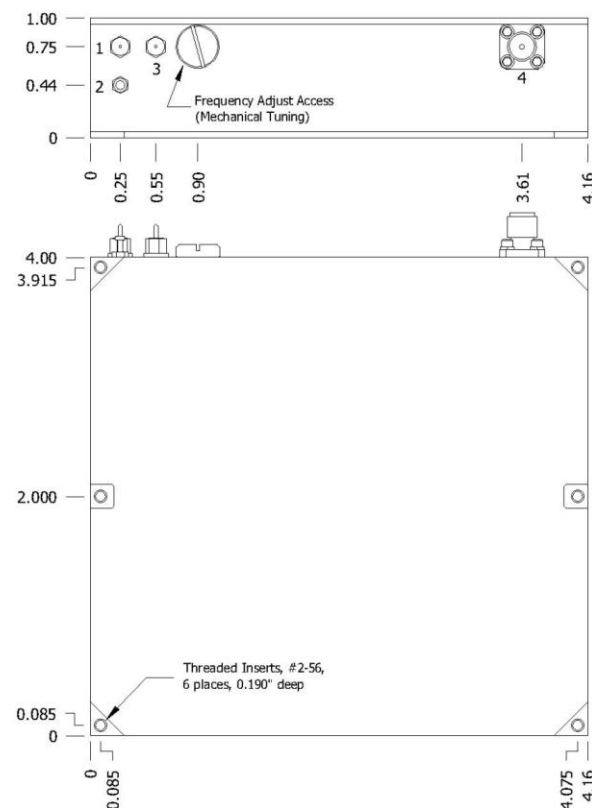

Wenzel Associates, Inc.

Austin, Texas

Title:

5.12 GHz Multiplied Crystal Oscillator (MXO-FR)

P/N:

501-25402

Rev:

-

Date:

01-26-12

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

± 0.030 "

0.XXX Dec:

± 0.010 "

FSCM:

62821

Page **1** of **1**