






Standards
NF C 96-315
MIL-DTL-39030

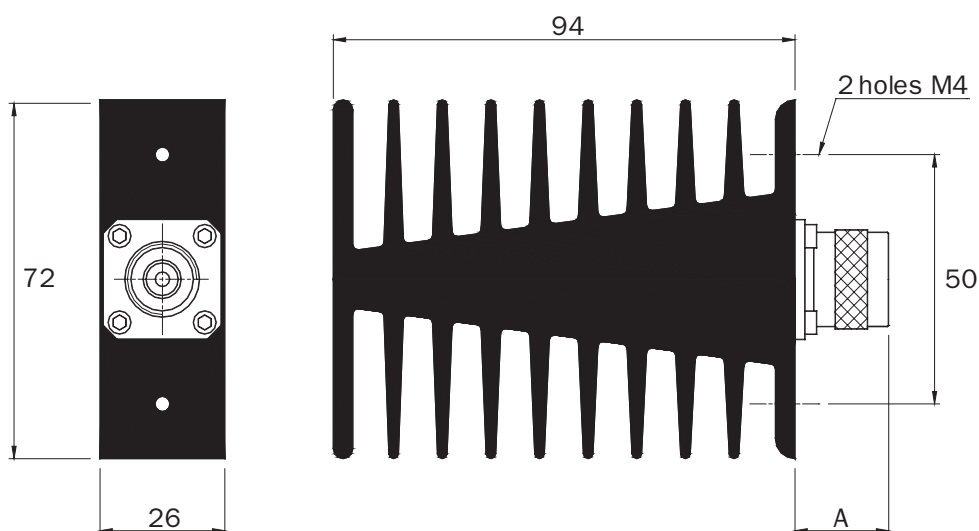

Impedance	$50 \Omega \pm 2\%$
Frequency	DC – 4 GHz
Max VSWR	≤ 1.10 at 2 GHz, ≤ 1.20 at 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	30 W
Peak power	5 kW
Weight	290 g



Dimensions in mm

P/N	Connector	A
17-3358	N m	21
17-3114	N f	19
17-0217	BNC m	22
17-0260	BNC f	18