

REVISIONS				DATE	APPROVED
2	REV	DESCRIPTION	DATE		
-		ORIGINAL RELEASE	2/7/03		

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 8.0 to 18.0 GHz
Gain: 45dB Typ.
Gain Flatness: +/-1.5dB Max.
Noise Figure: 3.5dB Typ.
OP1dB: 20dBm Min.
VSWR Input/Output: 2.0:1 Max.
DC Voltage Supply: +12 to +15V/DC
DC Current Draw: 385mA Max.

Features:

- Internal Voltage Regulation
Unconditional Stability
Standard Operating Temperature -20 to +70 Deg. C


Available Options:

- Various Package types
Various Connector types
Temperature Compensation
Hermetic Sealing
Gain and Phase Matching
MIL-STD-883 Screening Available


Environmental Ratings:

- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A
- Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

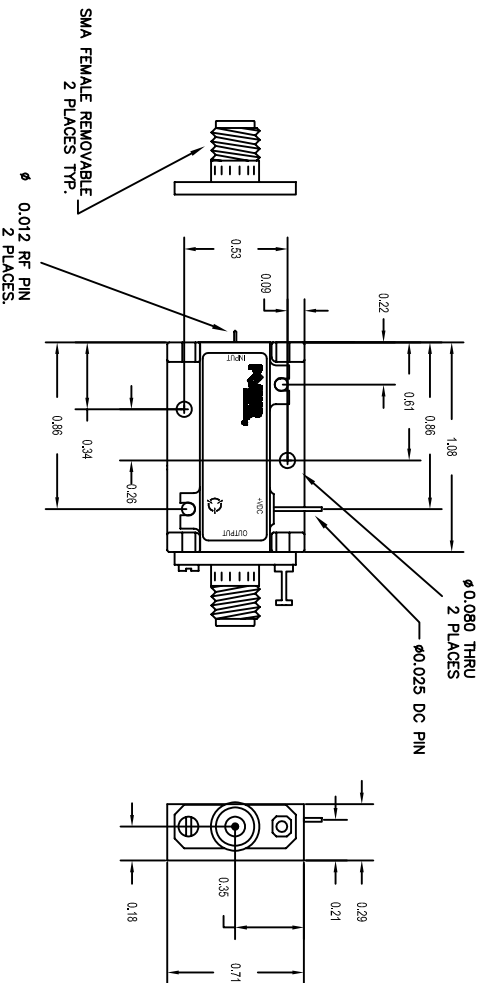

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

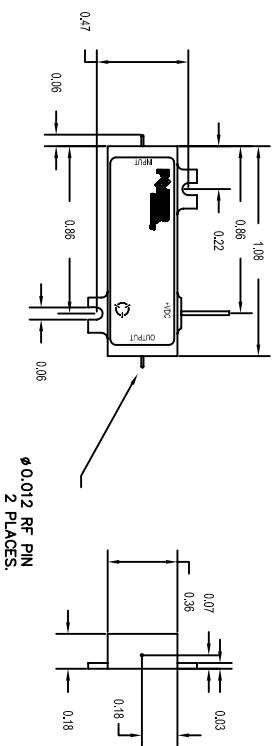

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
.XXX ± 0.005

PART NO.		MATERIAL:		FINISH:		DO NOT SCALE DRAWING	
DATE	APPROVALS	DATE	APPROVALS	DATE	APPROVALS	DATE	APPROVALS
2/27/03	K. MASON	2/27/03	K. MASON	2/27/03	K. MASON	2/27/03	K. MASON
5715 Industry Lane, Unit 11		PRODUCT FEATURE		PE2-45-88018R0-3R5-22-12-SFF		WEB - MODEL A	
FREDERICK, MARYLAND		B. 1LK53		B. 1LK53		WEB - MODEL A	
N/A		N/A		N/A		N/A	