




Standards
NF C 96-315
MIL-DTL-39030

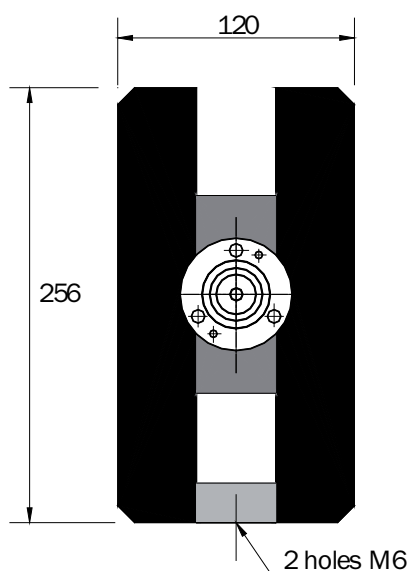

Impedance	$50 \Omega \pm 5\%$
Frequency	DC - 1 GHz (on request DC - 2.5 GHz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	600 W
Peak power	40 kW
Weight	8.2 kg



Dimensions in mm

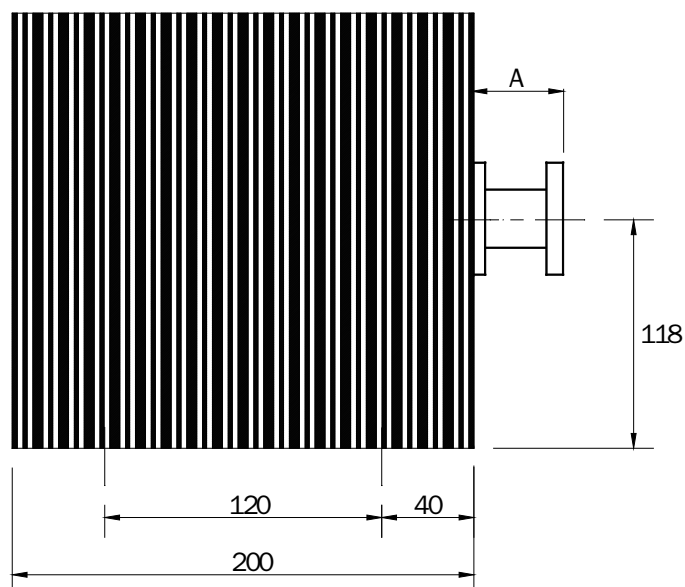

P/N	Connector	A
17-4503	N f	19
17-0002*	N f	19
17-0199	7-16 f	22
17-5310	EIA 7/8"	46
17-0367**	EIA 7/8"	46

* with thermoswitch 70°C

** with thermoswitch 140°C

Option	VSWR ≤ 1.05 470 to 860 MHz for digital applications
--------	--