


T-120S01

20 GHz to 22 GHz

Communication Band Coaxial ISOLATORS & CIRCULATORS

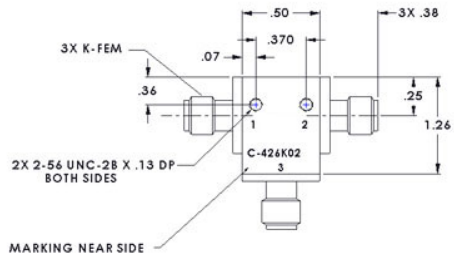

Specifications

RF Frequency	20 GHz to 22 GHz
Isolation	22 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.2:1
Peak Power	2 Watts (max)
Average Power	0.5 Watts (max)
Package Size	0.50 x 0.63 x 0.50"

Environmental Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
Specifications subject to change without notice

