



75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing

TECHNICAL DATA SHEET

PE44141

75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing

Configuration

Connector	Mini SMB Jack
Connector Specification	MIL-C-39012
Connector Interface Type	Solder Cup
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	2 Hole Flange

Electrical Specifications

Impedance, Ohms	75
-----------------	----

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	0.575 [14.61]
Width/Dia., in [mm]	0.188 [4.78]
Height, in [mm]	0.48 [12.19]
Weight, lbs [g]	0.004 [1.81]

Connector

Type	Mini SMB Jack
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing PE44141](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing

TECHNICAL DATA SHEET

PE44141

Plotted and Other Data

Notes:

Values at 25 °C, sea level

75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing PE44141](http://www.pasternack.com/mini-smb-jack-standard-solder-cup-terminal-connector-pe44141-p.aspx)


URL: <http://www.pasternack.com/mini-smb-jack-standard-solder-cup-terminal-connector-pe44141-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE44141 CAD Drawing

75 Ohm Mini SMB Jack Connector Solder Attachment 2 Hole
Flange Solder Cup Terminal, .328 inch Hole Spacing

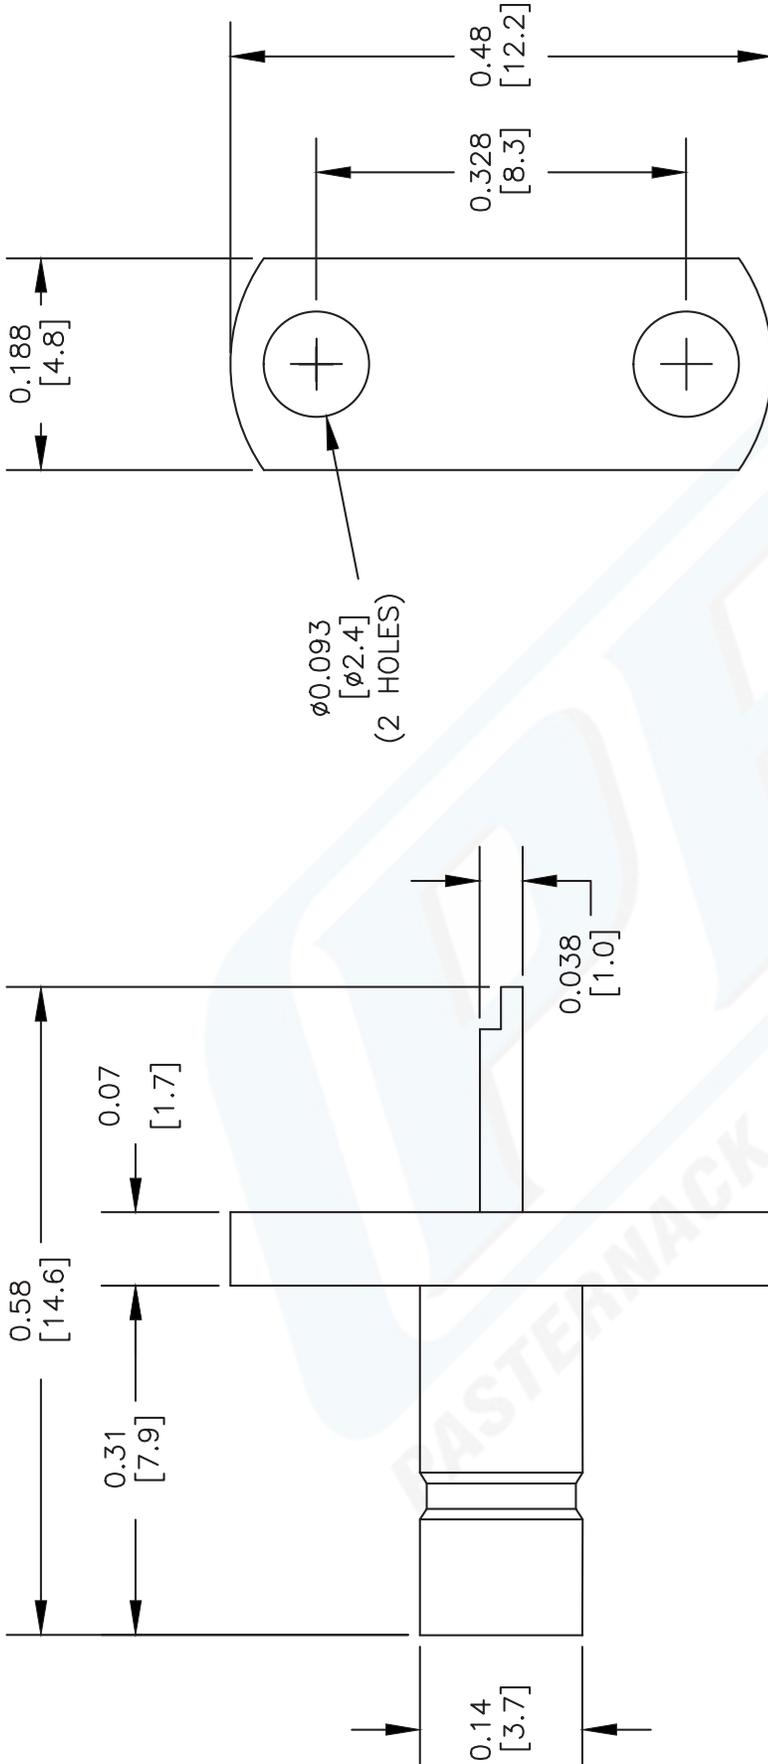

CRIMP SIZE REQUIRED

XXXX
XXXX

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44141

FSCM NO. 53919

CAD FILE 110703
SCALE N/A
SIZE A
XXXX

PE PASTERNAK
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com