





DATA SHEET · PRODUCTS & SERVICES

# Off-the-shelf internal antenna for DVB-H applications



Fractus specialises in enabling effective mobile communications. Using fractal technology, we design and manufacture optimised antennas to make your wireless devices more competitive. Our mission is to help our clients develop innovative products and accelerate their time to market through our expertise in antenna design, testing and manufacturing.

# Fractus® TVNow<sup>TM</sup> Mobile TV Dual-Band DVB-H (UHF + L Band) Antenna

The Fractus TVNow™ is an off-the-shelf internal antenna solution specifically designed for DVB-H applications, covering UHF and L-band requirements.

TVNow minimises your product development cost and time. It combines small size and high performance making TVNow an optimal choice for your portable DVB-H applications.

Its electrical and mechanical characteristics ensure design flexibility and optimal performance in devices such as: 2G & 3G enabled mobile phones, DVB-H enabled devices (PDAs, Ultra Mobile PC, Personal Media Player, Secure Digital cards), and many more.


## **Product Benefits**

Reduced Form Factor


P/N: FR01-B1-S-0-047


- Modularity SMD
- Superior Performance
- High Isolation (DVB-Hand GSM)
- Accelerated Development Cycle

 $40\ mm\ x\ 5\ mm\ x\ 4.8\ mm\ (image larger than actual size)$ 



#### TVNow<sup>TM</sup> Performance vs UHF DVB-H Specs



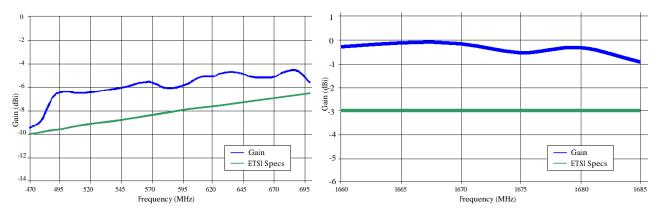

For additional information, please download the user manual from <a href="http://www.fractus.com/index.php/fractus/documentation">http://www.fractus.com/index.php/fractus/documentation</a> or contact <a href="mailto:info@fractus.com">info@fractus.com</a>.







DATA SHEET · PRODUCTS & SERVICES

Off-the-shelf internal antenna for DVB-H applications



 $Fractus^{\scriptsize @}\ TVNow^{\tiny TM}\ Mobile\ TV\ Dual\mbox{-Band}\ DVB\mbox{-H} \\ (UHF\mbox{+}\ L\ Band)\ Antenna$ 

P/N: FR01-B1-S-0-047

#### Fractus TVnow<sup>TM</sup> UHF DVB-H Antenna

Technical Features	
Frequency Range	470 – 698 MHz
With GSM Coexistence	1670-1675 MHz
Gain Curve	>2 dBi margin with DVB-H
	recommendations
Radiation Pattern	Omnidirectional
Gain Flatness	±2 dB
(horizontal diagram)	
Weight (approx.)	1.9 g
Temperature	-40 to 85° C
Impedance	50 Ω
Dimensions (L x W x H)	40.0 mm x 5.0 mm x 4.8 mm

Measures from the evaluation board (107.0 mm x 42.7 mm x 1.0 mm PCB) with the 4 elements matching network

### Matching Network Values

