




Model: PS-3800-4S

Description: 4-Way Power Divider
Operating Frequency: 2.8 – 5.2 GHz
Insertion Loss: 0.5 dB Max
Isolation: 22 dB Min
VSWR: Σ Port 1.25:1 Max
..... Outputs 1.25:1 Max
Amplitude Balance: ± 0.1 dB Max
Phase Balance: $\pm 1.5^\circ$ Max
Power Handling (@ SUM-Port): Load VSWR= ∞ 1W AVG/CW Max
..... Load VSWR <2:1 10W AVG/CW Max
Connectors: SMA (f)
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

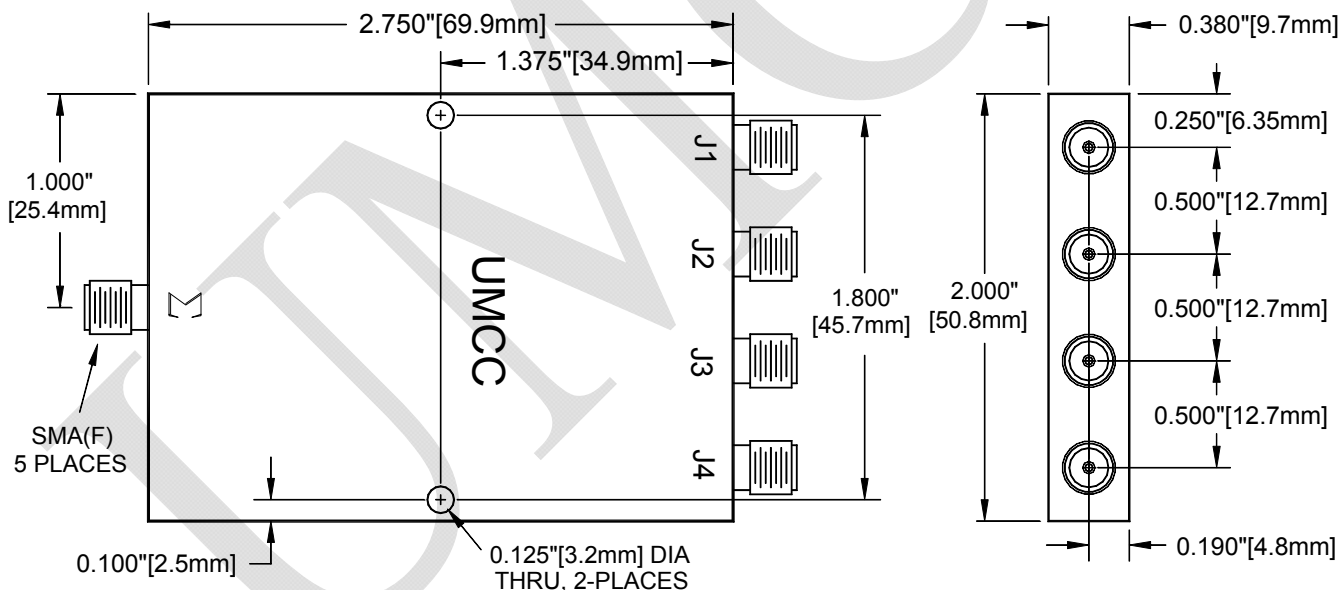

Weight

2.55 oz [72.3 g]