


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

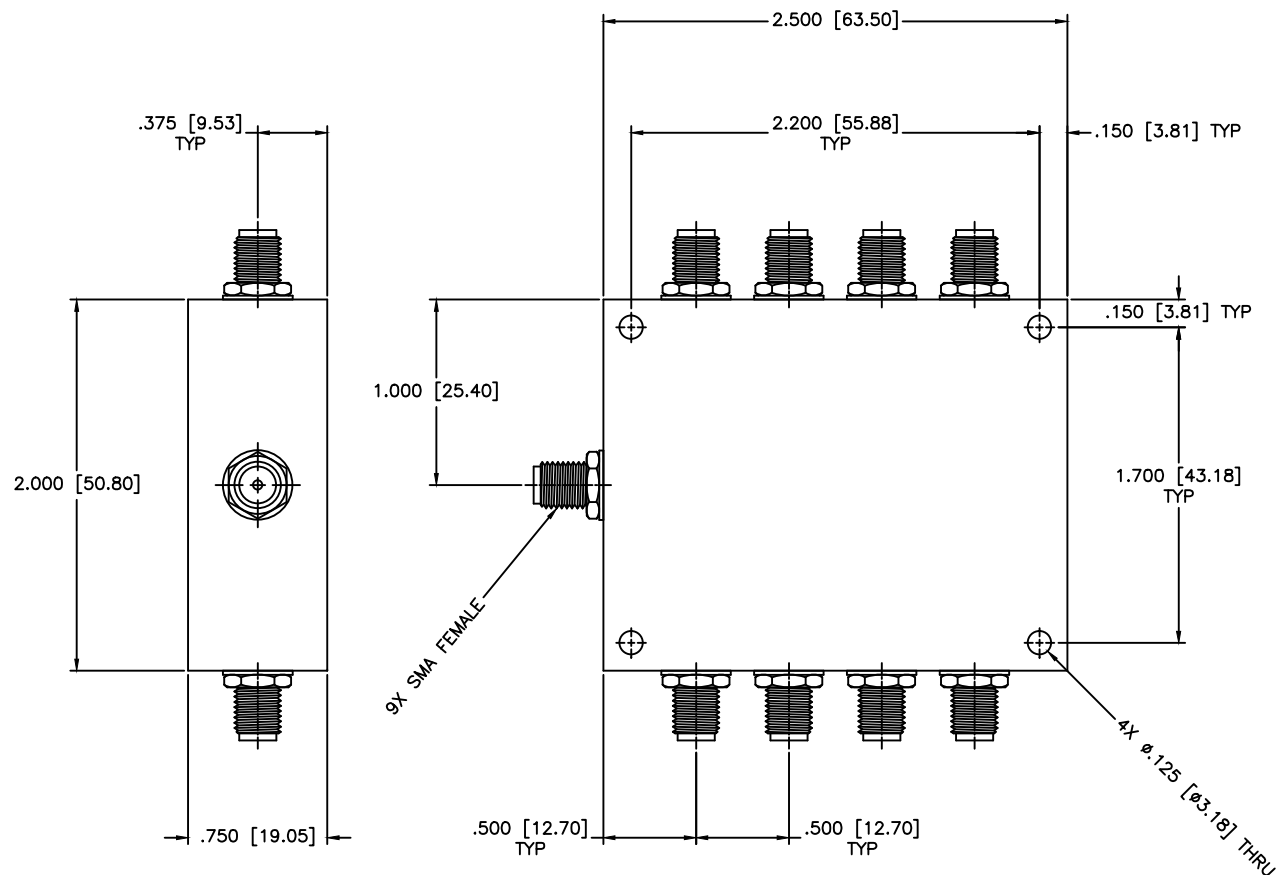

SPECIFICATIONS

Frequency Range: 20–1000 MHz
 Isolation: 20dB Min.
 VSWR: 1.50:1 Max.
 Insertion Loss: 2.6dB Max.
 Amplitude Balance: ± 0.6 dB Max.
 Phase Balance: ± 5 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 01-06-1997		DRAWING TITLE: 8-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 01-06-1997		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PL8-7
		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG. NO. 80293