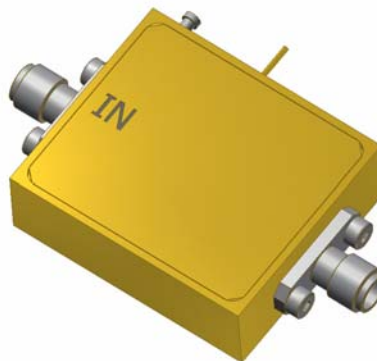


Datasheet**Description**

A comprehensive range of MMIC-based amplifiers covering 18-110GHz region are available. The FLNA-42 is a full K-band low noise amplifier.

Interfaces can be designed to suit the application as well as custom designs being available,

**Features**

- Low noise figures
- Full waveguide band
- Single power supplies
- Compact size


Applications

- Communication receivers
- Radar front ends
- Driver amplifiers
- Point to point communication

Specification	Unit	Min	Typ	Max
Frequency	GHz	18		26.5
Bandwidth	GHz		8.5	
Noise Figure	dB		3.0	3.5
Gain	dB		15	
DC Power	V/mA		8/100	
VSWR			2.0:1	

Datasheet

FTLXXXX Gain v RF Frequency

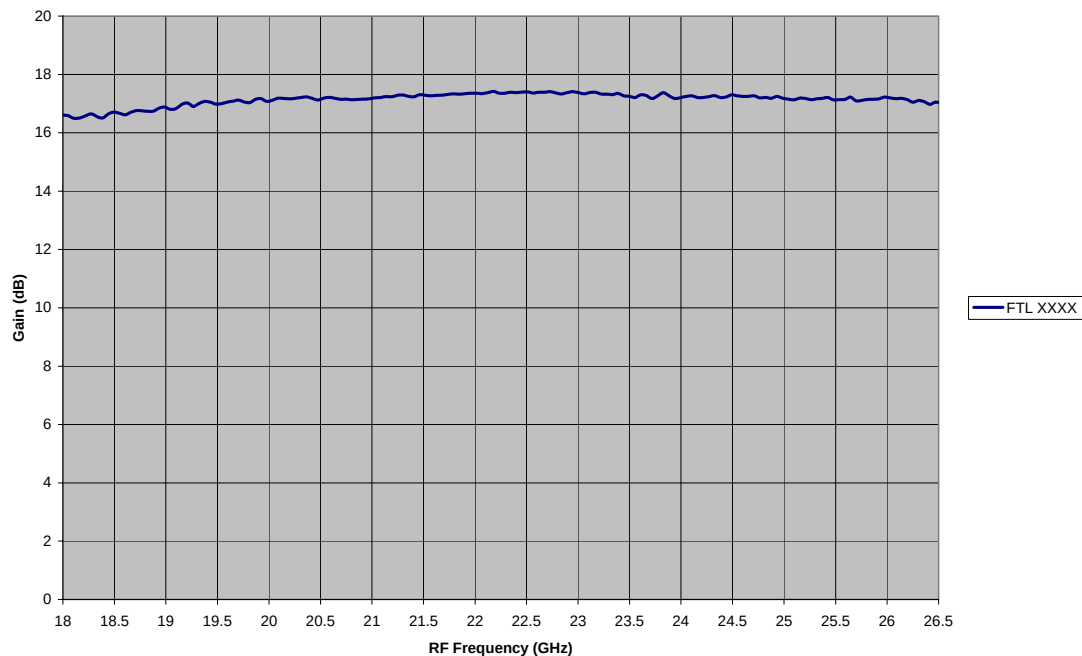

FTL XXXX Noise Figure v RF Frequency

