

TMA



SERIES TMA RF.COAXIAL CONNECTORS



Series TMA RF.Coaxial Connectors are one kind of middle-power blind mating connectors, with snap-on coupling mechanism, The interface conform with TNC. They are suitable for middle-power blindly insert machine box and machine cup board.


KEY PERFORMANCE			
Temperature range	-65 ~ +125℃	Voltage rating	500V(rms)
Characteristic Impedance	50Ω	Insulation resistance	5000MΩ min
Frequency range	0 ~ 11GHz	DielectricWithstanding voltage	1500V(rms)
VSWR	1.30	Durability	500 Cycles
Center conductor	0.002 Ω max	Outer conductor	0.002 Ω max

INTERFACE MATING DIMENSIONS

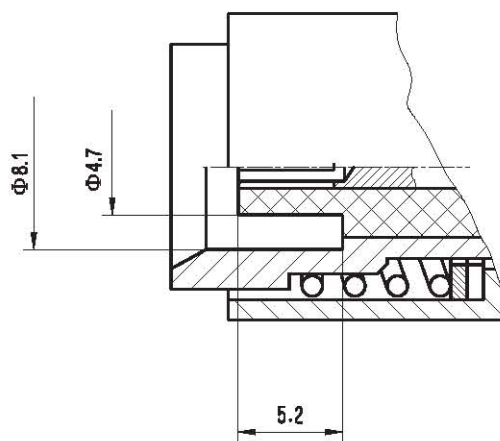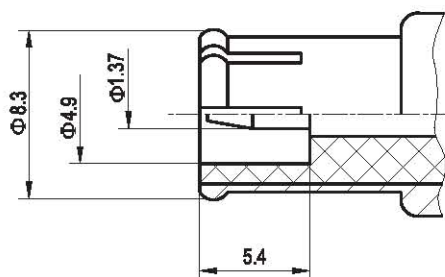




TMA-JFD 等

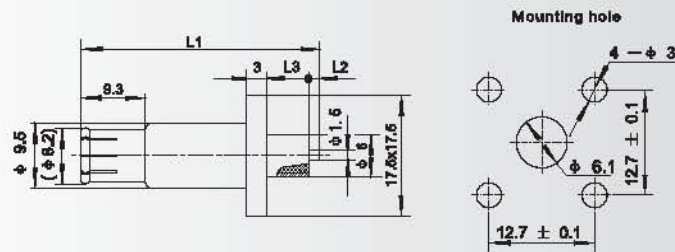


Type	L1	L2	L3
TMA-JFD	34.6	(1.6)	6
TMA-JFD1	33.6	(2)	4.8
TMA-JFD2	36.3	(2)	7.3




TMA-JFD4

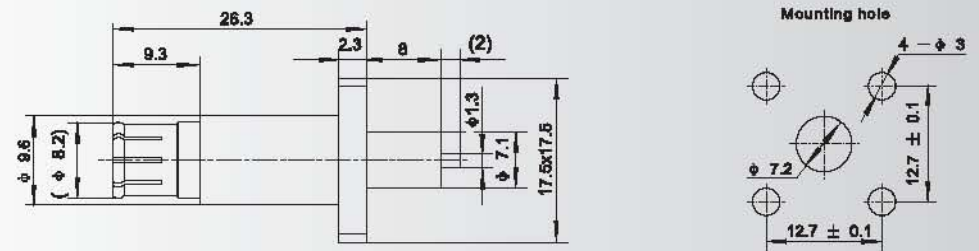


TMA-JFD3

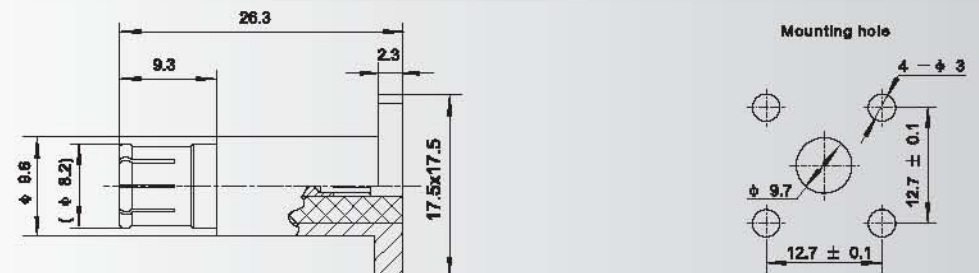

N/TMA-KFJ

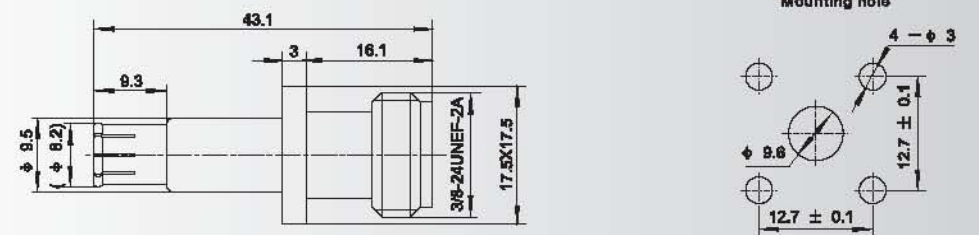

TMA-KFB3 等

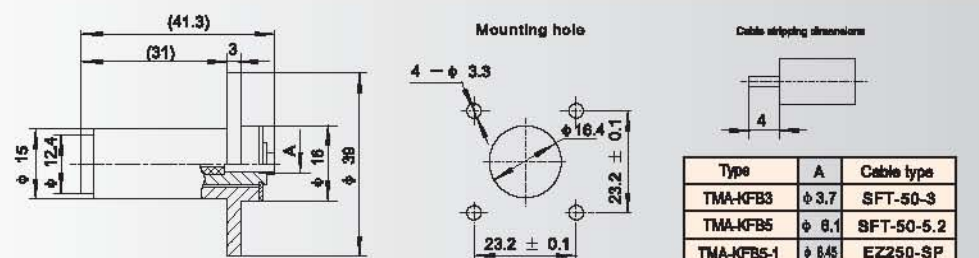

Type	A	Cable type
TMA-KFB3	ϕ 3.7	SFT-50-3
TMA-KFB5	ϕ 6.1	SFT-50-5.2
TMA-KFB5-1	ϕ 6.45	EZ250-SP

