


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

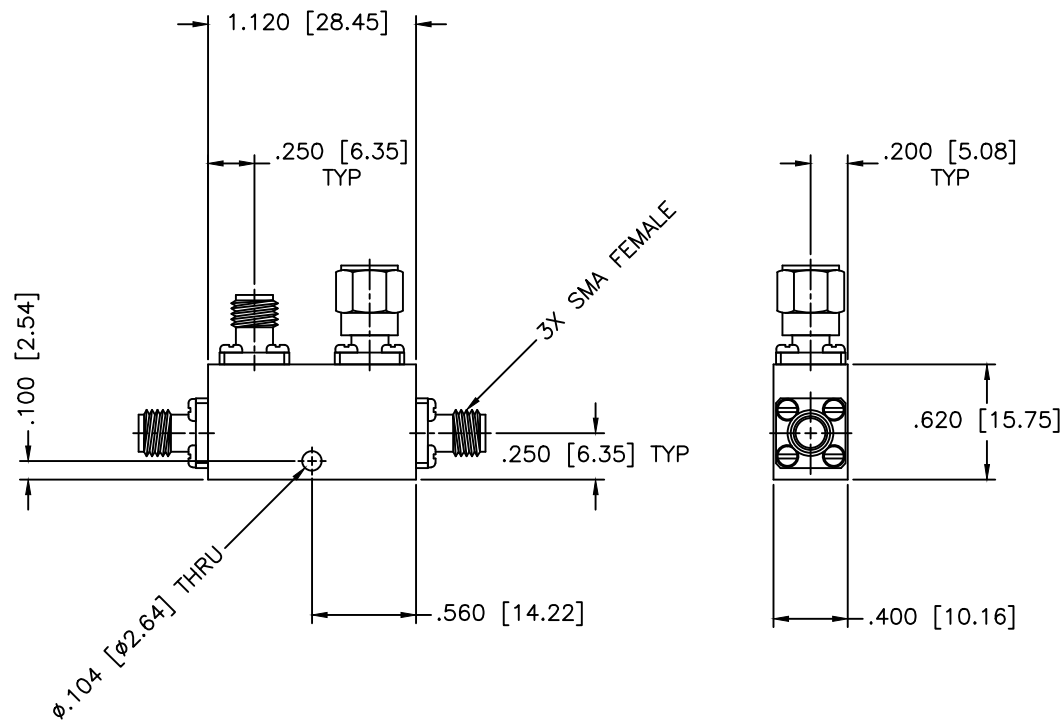

SPECIFICATIONS

Frequency Range: 18–26.5 GHz
 Coupling: 10±1.2dB
 Frequency Sensitivity: ±0.7dB
 Insertion Loss: 1.5dB Max.
 Directivity: 11dB Min.
 VSWR: 1.50:1 Max.
 Power: 50W, 5W, 1kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:			
		DIRECTIONAL COUPLER			
DRAWN:		DATE:		PART NO.	
Paitoon Luekhamhan		03-05-1998		C9-10	
APPROVED:		DATE:		CAGE CODE:	SIZE: A
T. Nguyen		03-05-1998		OD2L5	REV: A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DWG NO.	
				81914	
				DO NOT SCALE THE DRAWING	