


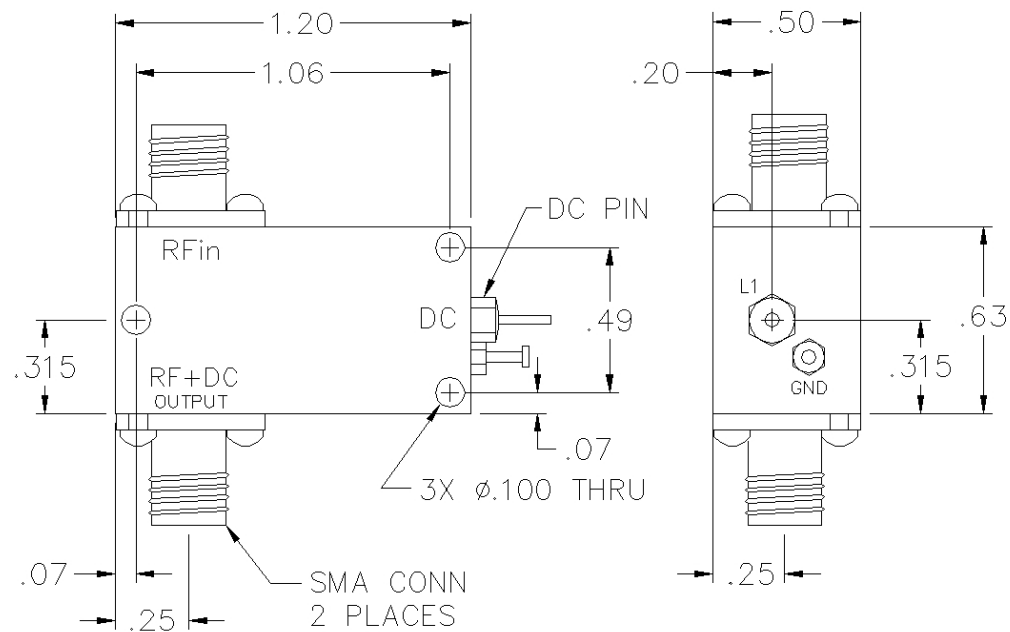

## SPECIFICATIONS

Frequency Range: 5 - 12 GHz  
 Isolation: 30 dB Min  
 Insertion Loss: 0.8 dB Max  
 Current<sup>1</sup>: 250 mA Max  
 Power: 1 Watt Max  
 Voltage: 50 Vdc Max  
 VSWR: 1.50:1 Max

### Notes:

- Higher current and isolation requirements available.

**PULSAR** MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION  
 48 INDUSTRIAL WEST, CLIFTON NJ 07012  
 TEL: 973-779-6262 FAX: 973-779-2727  
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

**Bias Tee**

MODEL NO. :

**BT-30-400D**

DIMENSIONS ARE IN INCHES  
 DECIMAL TOLERANCE:  
 2 PLACE  $\pm$  .02  
 3 PLACE  $\pm$  .010

SIZE  
**A**

CAGE CODE :  
**0HR85**

REV CODE :

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1