

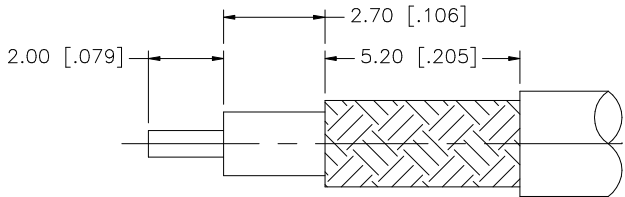
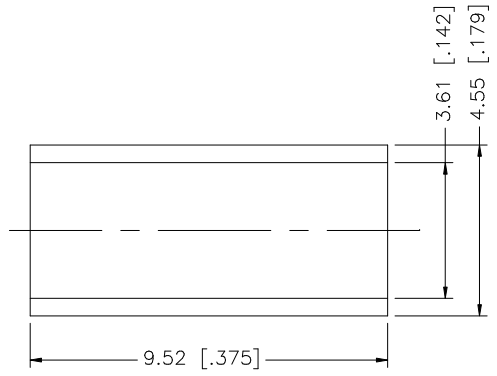


REV.	DATE	DESCRIPTION
NC	05/14/06	INITIAL RELEASE



RECOMMENDED CABLE
STRIPPING DIMENSIONS

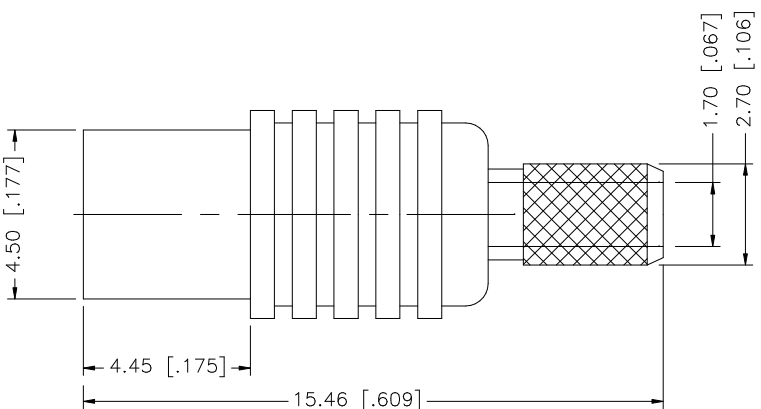

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	05/14/06						
6						CHECKED								
5						ISSUED				PART DESCRIPTION MCX CRIMP JACK – 50ohm (FOR RG–316U/D)				
4	FERRULE	COPPER	GOLD	1		SHEET	1 OF 1							
3	CONTACT PIN	BER. COPPER	GOLD	1		PART NO. 252165								
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	GOLD	1		DWG. NO. 252165.DWG REV. NC SIZE A SCALE NA								
DESCRIPTION MATERIAL FINISH QTY														