


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

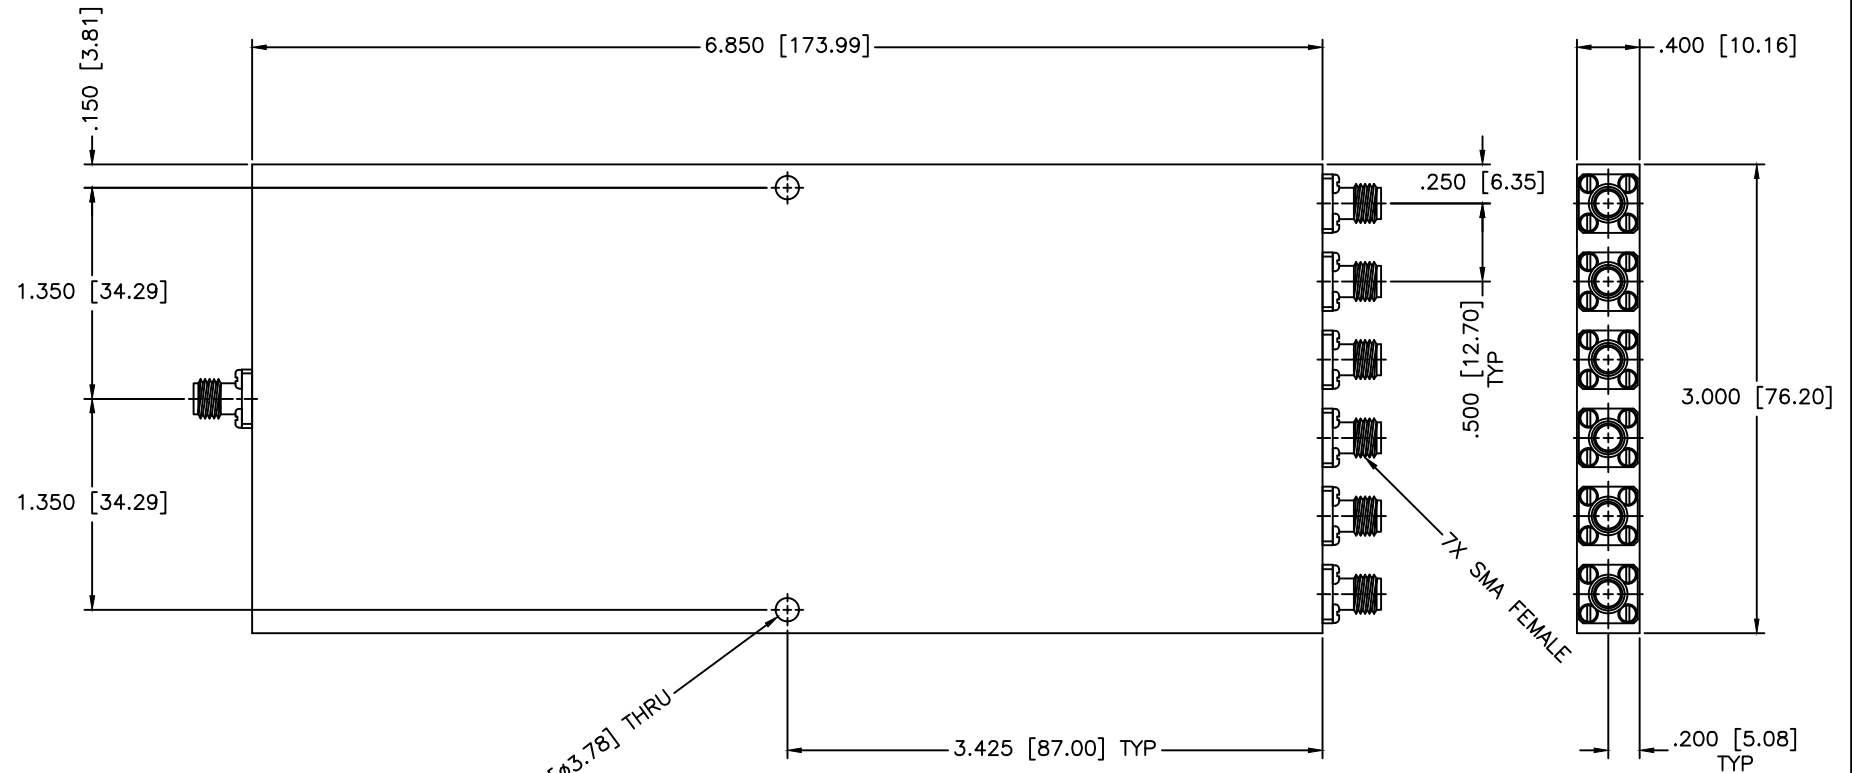

SPECIFICATIONS

Frequency Range: 1–3 GHz
 Insertion Loss: 1.7dB Max.
 Isolation: 16dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 2.5 dB Max.
 VSWR In/Out: 1.70:1/1.50:1 Max.
 Average Power: 20W (Load vswr@1.2)

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ANGLES: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 12-10-2010		DRAWING TITLE: 6-WAY POWER DIVIDER		
APPROVED: T. Nguyen DATE: 12-10-2010		PART NO.: PS6-46		
THIRD ANGLE PROJECTION		CAGE CODE: 0D2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 85126