



RF-LAMBDA

The power beyond expectations

RFLT4W1G18GN

N 4-Way Power Divider 1-18GHz




Wide Band Power Divider

Very small package
Excellent phase and amplitude balance
Bi-Directional as divider and combiner *
Low Insertion loss and high isolation
Standard: MIL E-5400, MIL E -16400
High power handling capability

* 5W maximum input when work as combiner.

Electrical Specifications				
Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Phase unbalance (degree)	Amplitude Unbalance (dB)
1.0-18	3	16	6.0	0.5
Forward Power (W)	Impedance (Ω)	Reverse Power (W)	Input VSWR	Output VSWR
30	50	2	1.7	1.5

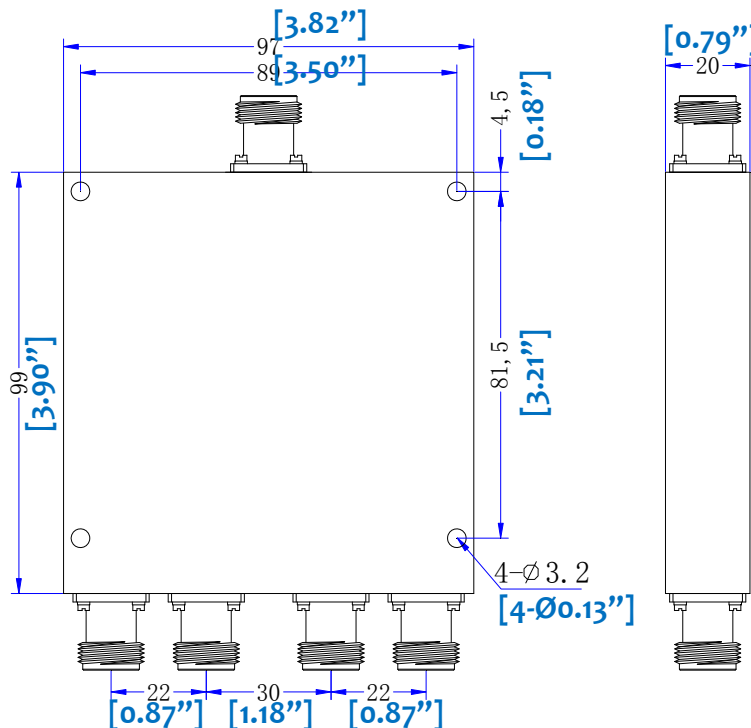

Environmental Specifications:

Operating Temperature: -30 °C~+70° C
Storage Temperature: -55 °C~+95° C
Applications: indoor, 0-95% ° C

1.0GHz-18GHz 4-Way N Type Power Divider



RF-LAMBDA

The power beyond expectations

RFLT4W1G18GN

1.0GHz-18GHz 4-Way N Type Power Divider

