



4 kW Forced air oil cooled




Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 Ω ± 5%
Frequency	DC – 1 GHz (on request DC – 2.5 GHz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-25 to +55°C
Average power @ 25°C	4 kW
Cooling	Oil + forced air
Weight	40 kg

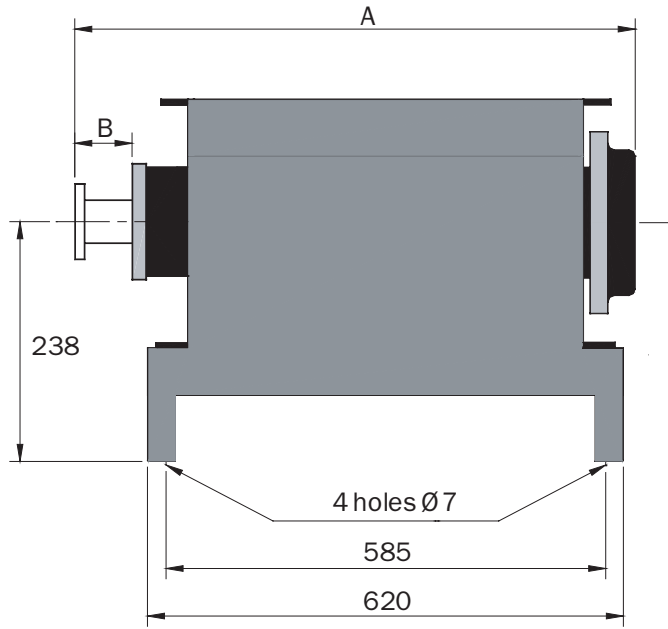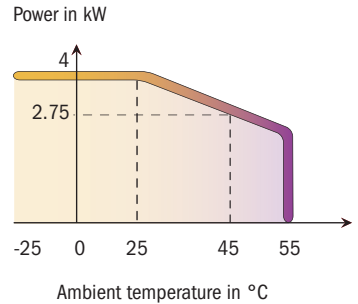

Dimensions in mm

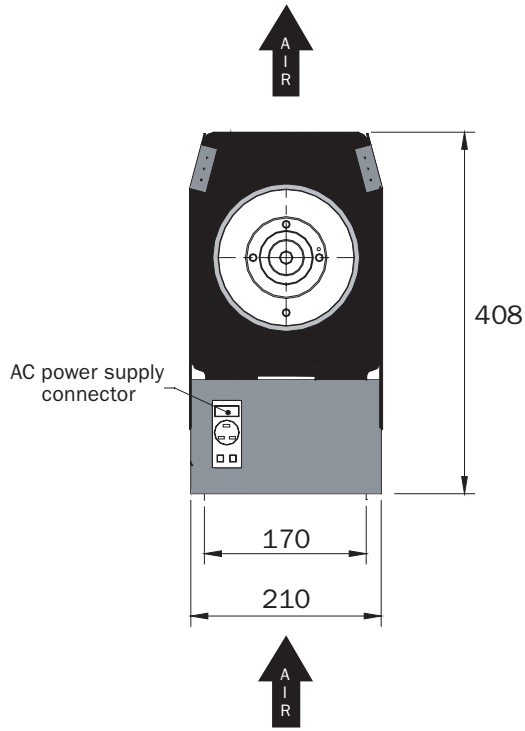

P/N	Connector	AC power supply	A	B
17-5233	EIA 7/8"	220 V – 50/60 Hz	745	55
17-5234	EIA 1.5/8"	220 V – 50/60 Hz	765	77
17-5235	EIA 3.1/8"	220 V – 50/60 Hz	780	95

Option	VSWR ≤ 1.05 470 to 860 MHz for digital applications
--------	---