


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

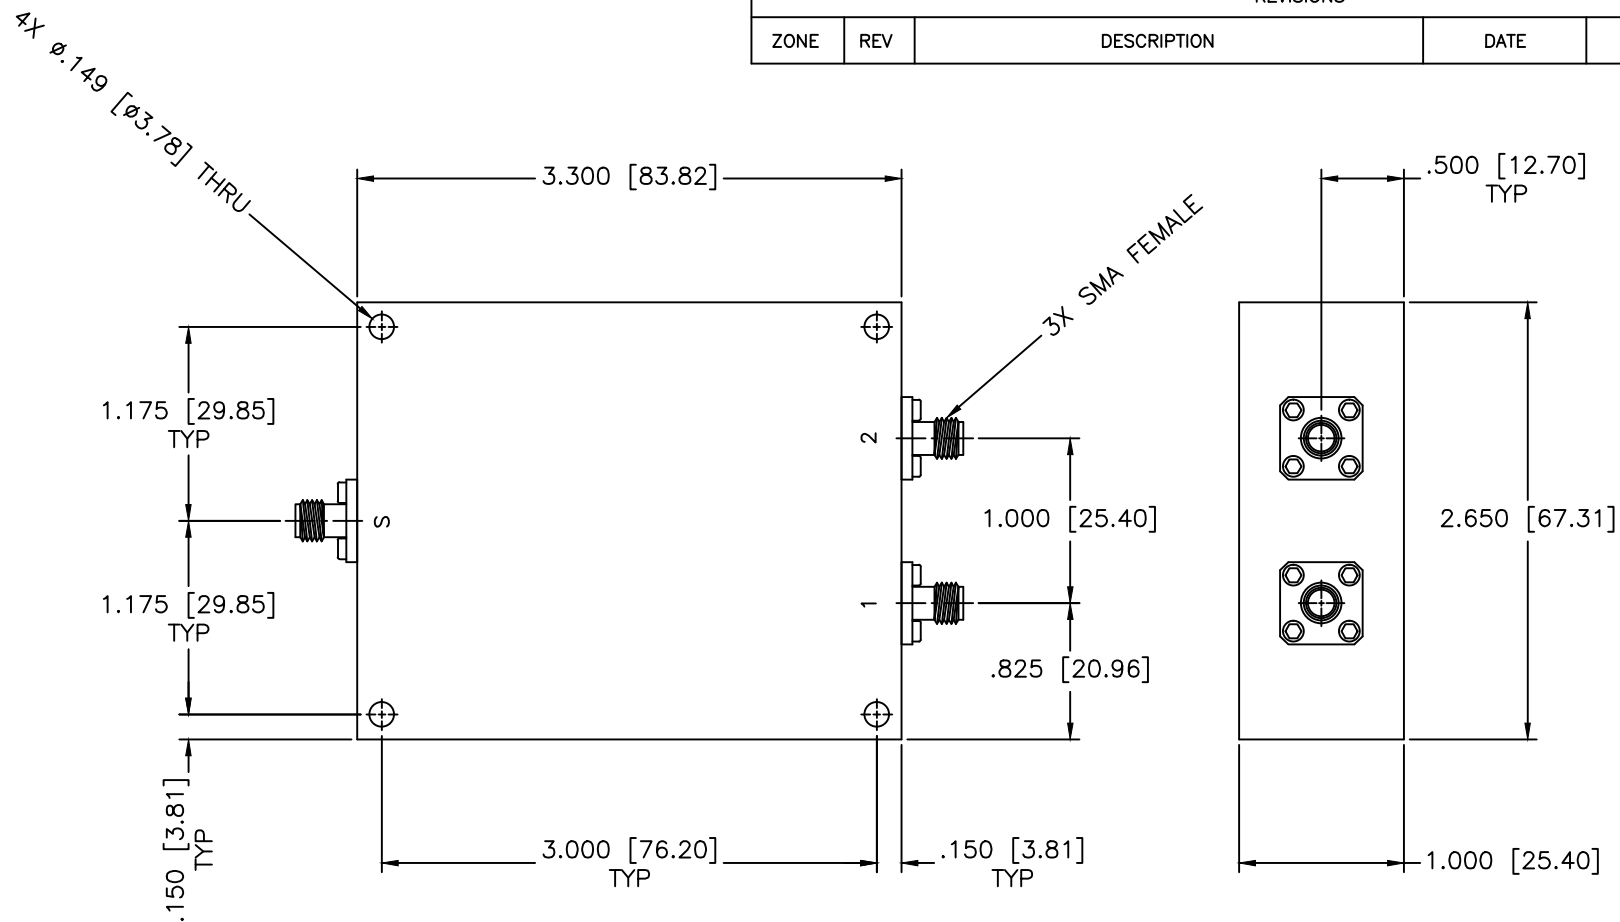

SPECIFICATIONS

Frequency Range: 225–400 MHz
 Insertion Loss: 0.3dB Max.
 Isolation: 25dB Min.
 VSWR: 1.30:1 Max.
 Power: 200 W CW
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Operating Temperature: -55°C to $+70^{\circ}\text{C}$

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.05 ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: 2-WAY POWER DIVIDER/COMBINER		
DATE: 01-31-2014		PART NO. PLH2-41		
APPROVED: T. Nguyen		CAGE CODE: OD2L5 SIZE: N/A REV: A DWG NO. 85314		
DATE: 01-31-2014		DO NOT SCALE THE DRAWING		