


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

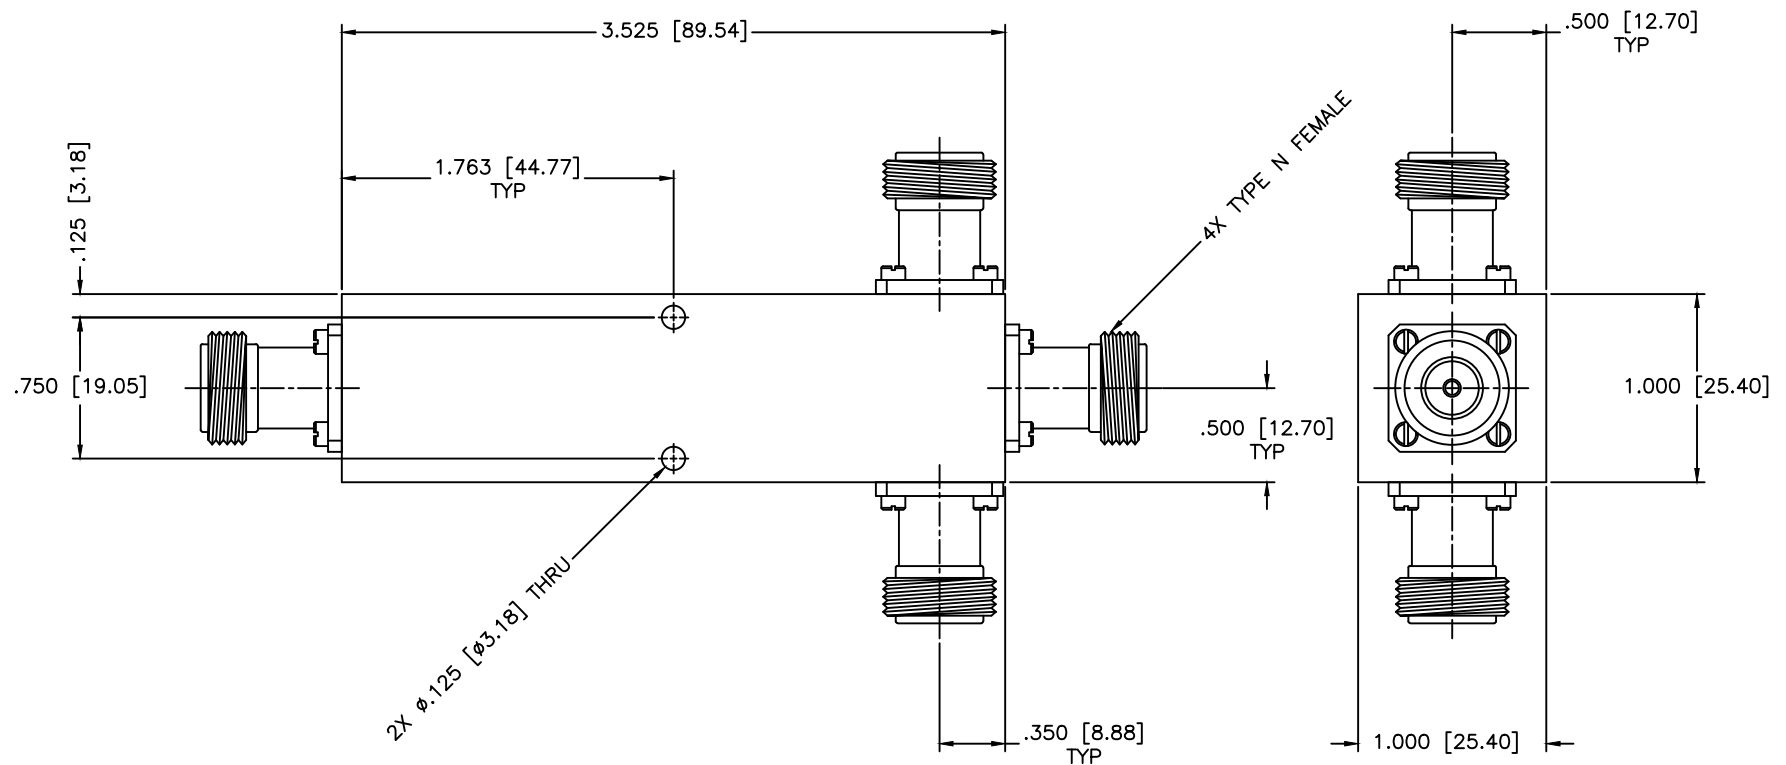

SPECIFICATIONS

Frequency Range: 2–14 GHz
Insertion Loss: 1.8dB Max.
Isolation: 16dB Min.
Amplitude Balance: ± 0.4 dB Max.
Phase Balance: ± 12 Deg. Max.
VSWR Input/Output: 2.00:1/1.80:1 Max.
Power: 30 Watts

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		3-WAY POWER DIVIDER			
DRAWN:		PART NO.			
Paiboon Luekhamhan		PS3-6/NF			
DATE:		CAGE CODE:	SIZE:	REV:	
01-12-2012		OD2L5	A	N/A	
APPROVED:		DO NOT SCALE THE DRAWING			
T. Nguyen		DWG NO.			
DATE:		86075			
01-12-2012					