
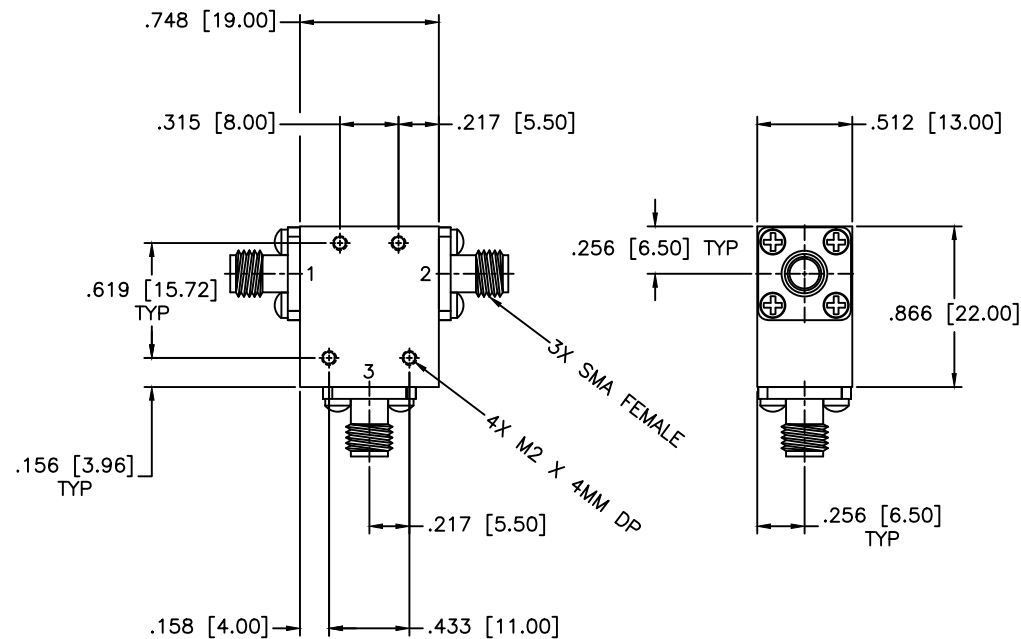


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 6–18 GHz
 Isolation: 11dB Min.
 Insertion loss: 1.5dB Max.
 VSWR: 1.90:1 Max.
 Operating Temperature: –40°C to +71°C
 Power: 25W Avg, 200W Peak

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR
DRAWN: Paiboon Luekhamhan	DATE: 05-18-2010	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: CS-38-25
APPROVED: T. Nguyen	DATE: 05-18-2010	THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 84824
				DO NOT SCALE THE DRAWING