



SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

## Electromechanical Relay Switches Technical Data Sheet

PE71S6146

### Features

- Single Pole Six Throw Relay Switch
- DC to 40 GHz Frequency Range
- 1M Cycle Min Operating Life
- Latching Actuator
- Self Cut Off, Reset, Suppression Diodes
- Insertion Loss 0.9 dB max
- Isolation 50 dB min
- 3 Watts Avg Power Max
- Switching Sequence Break Before Make

### Applications

- Test & Measurement
- Communications System
- Instrumentation

### Description

The PE71S6146 is a Single Pole Six Throw Electromechanical Relay Switch that operates from DC to 40 GHz and has a rating of 3 Watts input power (CW) in a Break Before Make condition. The design features a Latching Actuator with Self Cut Off, Reset circuitry, Suppression Diodes and is rated for 1M Life Cycles for high reliability operation. Insertion loss is specified from 0.2 dB max and Isolation from 70 dB min, with +12 Vdc operating voltage and performance is guaranteed over -35°C to +85°C. The package interface uses solder terminals and 2.92mm Female connectors.

### Electrical Specifications

Switch Type	SP6T, Reflective
Actuator Type	Latching
Switching Sequence	Break Before Make
Actuator Options	Self Cut Off, Reset, Diodes
Polarity	Positive Common

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
Operating Voltage		12		Volts
Actuating Current @ 12 Volts			480	mA
VSWR			2:1	
Insertion Loss			0.9	dB
Isolation	50			dB
Input Power (CW) (40 GHz)			3	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Latching Switch DC to 40 GHz, 2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes PE71S6146](#)



SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

## Electromechanical Relay Switches Technical Data

PE71S6146

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18	18 to 26.5	26.5 to 40	GHz
VSWR, Max	1.3:1	1.4:1	1.5:1	1.7:1	2:1	
Insertion Loss, Max	0.2	0.4	0.5	0.8	0.9	dB
Isolation, Min	70	60	60	55	50	dB

### Mechanical Specifications

#### Size

Length	2.375 in [60.33 mm]
Width/Diameter	2.25 in [57.15 mm]
Height	2.25 in [57.15 mm]
Weight	0.53 lbs [240.4 g]
Body Material and Plating	Aluminum
Package Type	Connectorized Module

Operating Life	1,000,000 Cycles
Switching Time	35 ms Max

#### Connectors

RF Connector Type	2.92mm Female
RF Connector Contact Material and Plating	Beryllium Copper, Gold
RF Connector Body Material and Plating	Passivated Stainless Steel
Control Connector	Solder Pin

### Environmental Specifications

#### Temperature

Operating Range	-35 to +85 deg C
ESD Sensitivity	ESD Sensitive Material. Transport material in Approved ESD bags. Handle in approved ESD Workstation.



Environmental Specification Notes:  
Designed to meet MIL-DTL-3928

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)  
Not RoHS Compliant

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Latching Switch DC to 40 GHz, 2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes PE71S6146](#)





SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

## Electromechanical Relay Switches Technical Data

PE71S6146

### Typical Performance Data

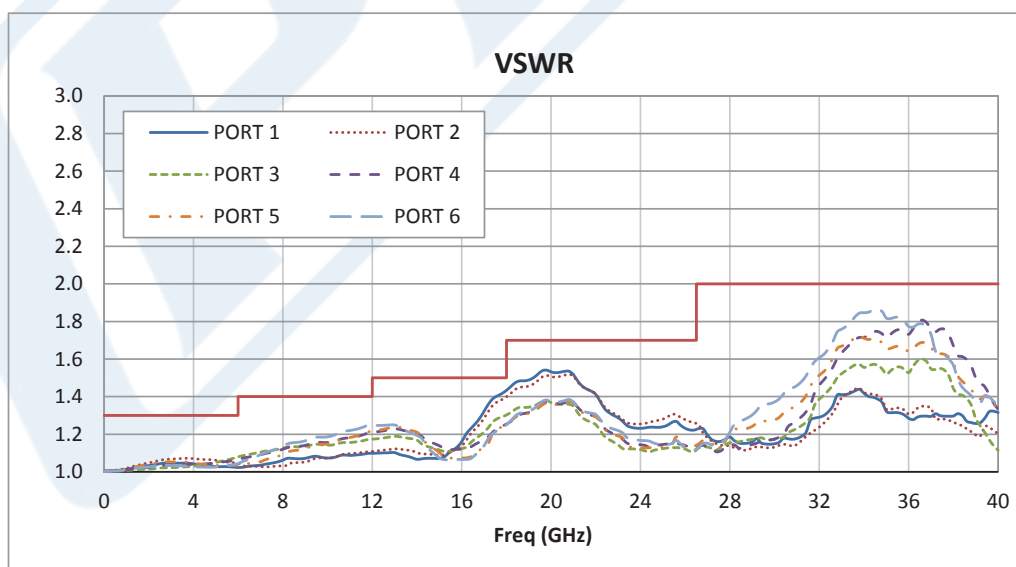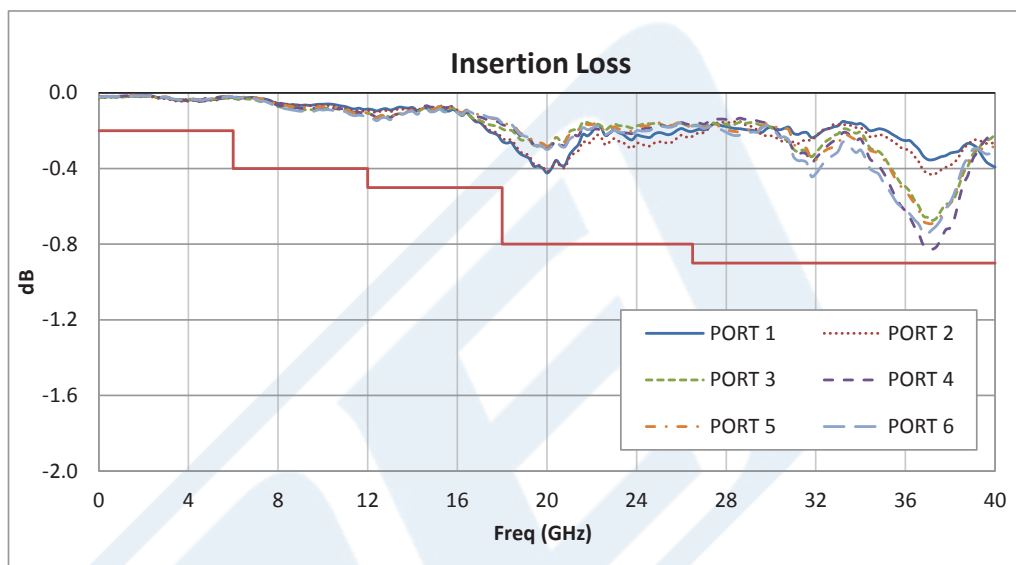


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Latching Switch DC to 40 GHz, 2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes PE71S6146](#)



SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

## Electromechanical Relay Switches Technical Data

PE71S6146

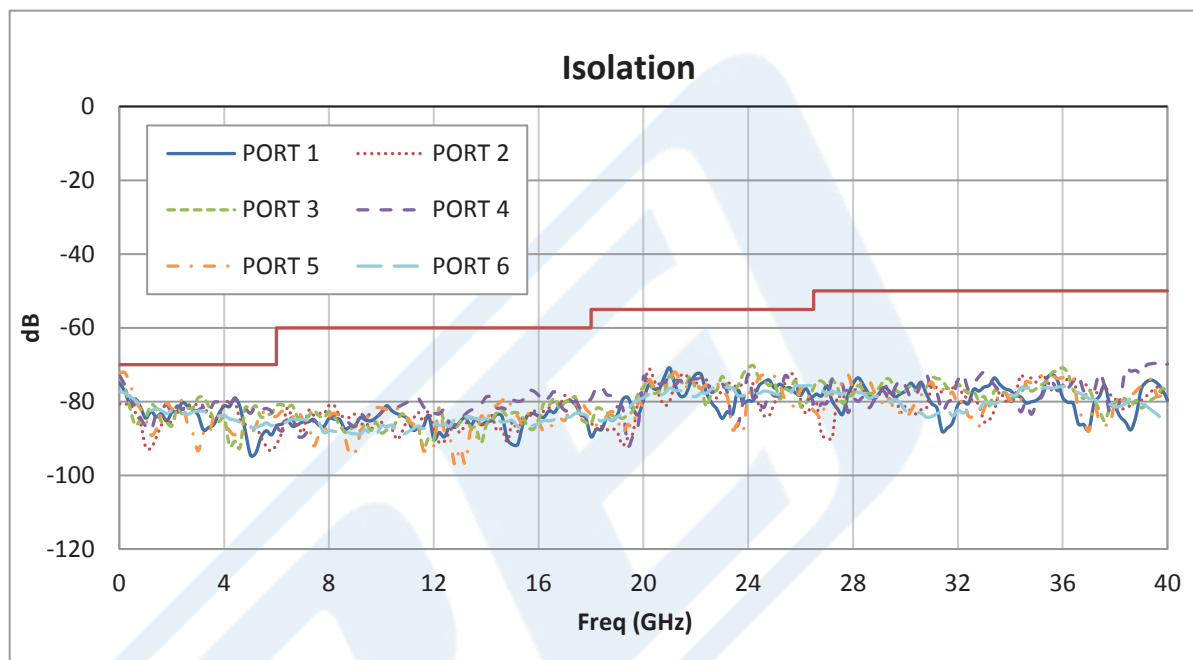

SP6T Electromechanical Relay Latching Switch DC to 40 GHz, 2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Latching Switch DC to 40 GHz, 2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes PE71S6146](http://www.pasternack.com/2.92mm-sp6t-electromechanical-relay-switch-40-ghz-latching-pe71s6146-p.aspx)

URL: <http://www.pasternack.com/2.92mm-sp6t-electromechanical-relay-switch-40-ghz-latching-pe71s6146-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE71S6146 CAD Drawing

SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

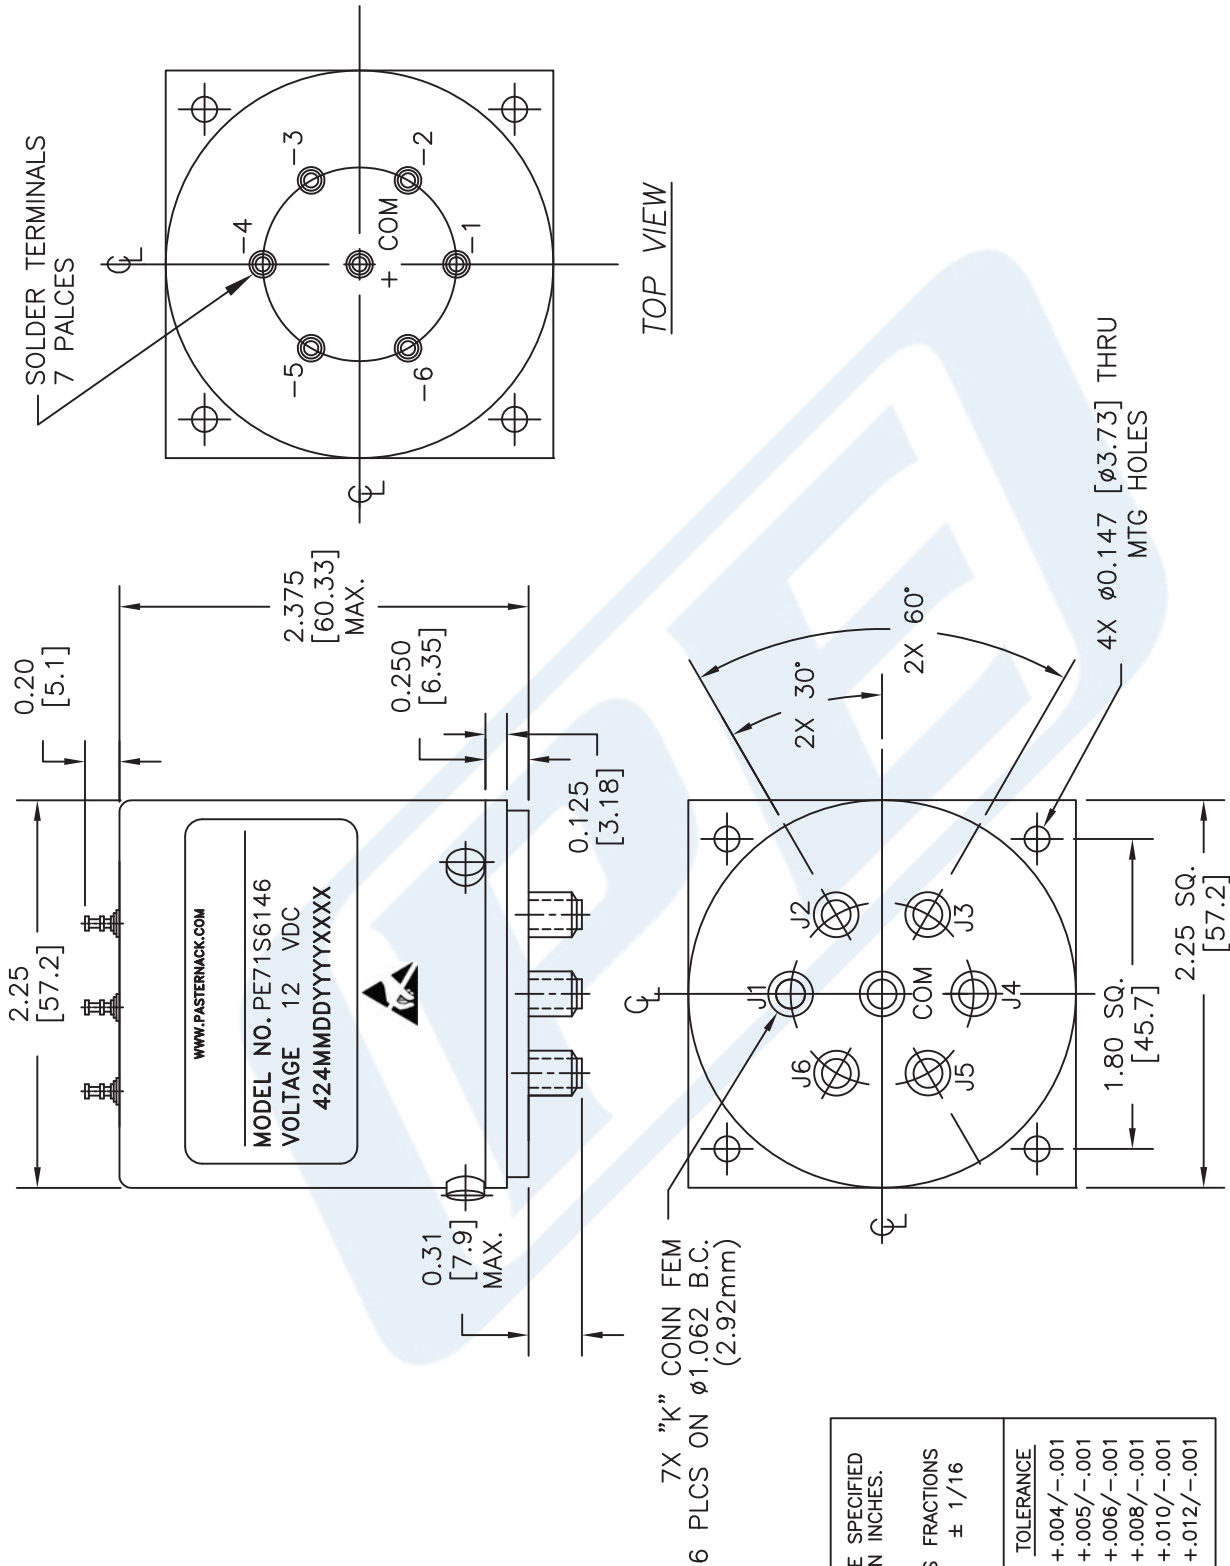

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
DECIMALS	ANGLES	FRACTIONS
.XX ±.03	± 1°	± 1/16
.XXX ±.010		
HOLE DIAMETER	TOLERANCE	
.0135 TO .125	+.004/- .001	
.126 TO .250	+.005/- .001	
.251 TO .500	+.006/- .001	
.501 TO .750	+.008/- .001	
.751 TO 1.000	+.010/- .001	
1.001 TO 2.000	+.012/- .001	

\* THESE DIMENSIONS AND TOLERANCES  
SUPERSEDE NOTE #1 ON TITLE BLOCK.

**PASTERNAK®**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

**PE71S6146**

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 031615


SCALE N/A

SIZE A

200

PE71S6146 CAD Drawing

SP6T Electromechanical Relay Latching Switch DC to 40 GHz,  
2.92mm, 3 Watts, 12V Control, Self Cut Off, Reset, Diodes

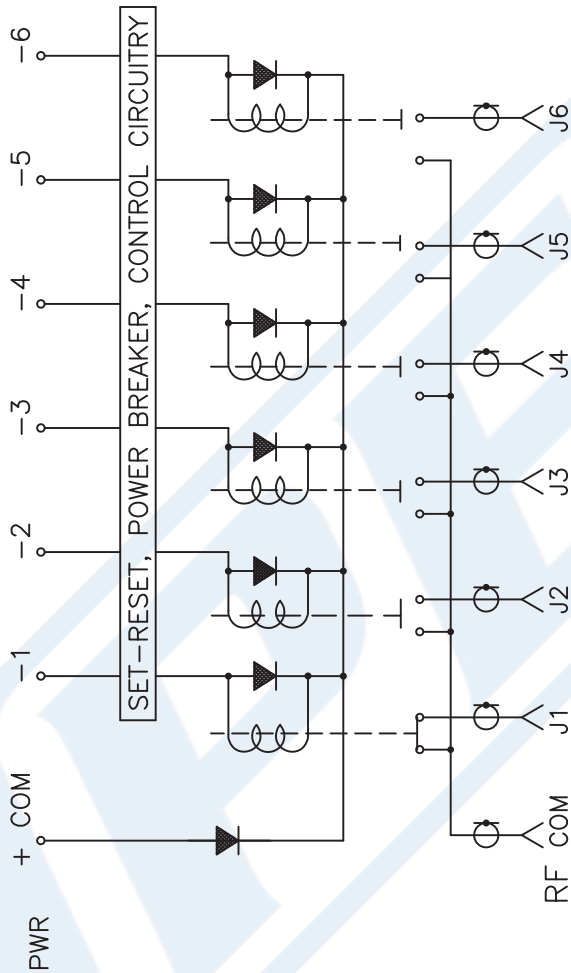

SCHEMATIC LATCHING WITH "K" CONN.  
SHOWN IN POSITION 1 (COM - J1)

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE71S6146

FSCM NO. 53919

CAD FILE

030515

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com