



T9 - T12 SERIES SP9T - SP12T DC - 15.0 GHz OPEN PORTS TERMINATED



FREQUENCY: GHz	DC - 2.0	2.0 - 4.0	4.0 - 8.0	8.0 - 12.4	12.4 - 15.0
VSWR (MAX.)	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (MAX.)	0.20	0.25	0.30	0.40	0.50
ISOLATION (MIN.)	90	80	80	70	60
IMPEDANCE	50 Ohms				
MECHANICAL					
CONTACT		:	BREAK BEFORE MAKE		
ACTUATOR		:	FAILSAFE, LATCHING, MOMENTARY		
SWITCHING SPEED		:	20 mSEC MAX.		
ELECTRICAL					
ACTUATOR VOLTAGE		:	28.0, 12.0, 15.0, 24.0 Vdc		
ACTUATOR CURRENT		:	CONTACT CEI		
POWER HANDLING		:	200 WCW @ 1.0 GHz (STANDARD)		
TERMINATION		:	8 WATTS MAX.		
ENVIRONMENTAL					
OPERATING TEMP		:	-40 DEG. C TO 90 DEG. C (STANDARD)		
		:	-54 DEG. C TO 90 DEG. C (OPT. /MS)		
SINE VIBRATION		:	30 G'S ms		
RANDOM VIBRATION		:	20 G'S ms		
LIFE		:	1,000,000 CYCLES		
FINISH					
RF CAVITY		:	ALUMINUM ELECTROLESS NICKEL PLATED PER MIL-C-26074, CLASS 4 (EXCEPT LOW OR ULTRA LOW IM MODELS)		
ENCLOSURE		:	ALUMINUM, BLUE OR BLACK		
CONTACT		:	BERYLLIUM COPPER, GOLD PLATED PER MIL-G-45204		
CONNECTOR SHELL		:	CRES, PASSIVATED PER QQ-P-35 OR BRASS, ELECTROLESS NICKEL PLATED PER MIL-C-26074		
AVAILABLE OPTIONS					
INDICATOR CIRCUITRY		:	CUT OFF POWER CIRCUIT		
SUPPRESSION DIODE		:	D'SUB MINIATURE SERIES		
TTL LOGIC		:	MS CONNECTOR OR EQUIV. (MIL-SPEC)		
LOW, ULTRA LOW, AND SUPERIOR INTERMODULATION (IM)		:			

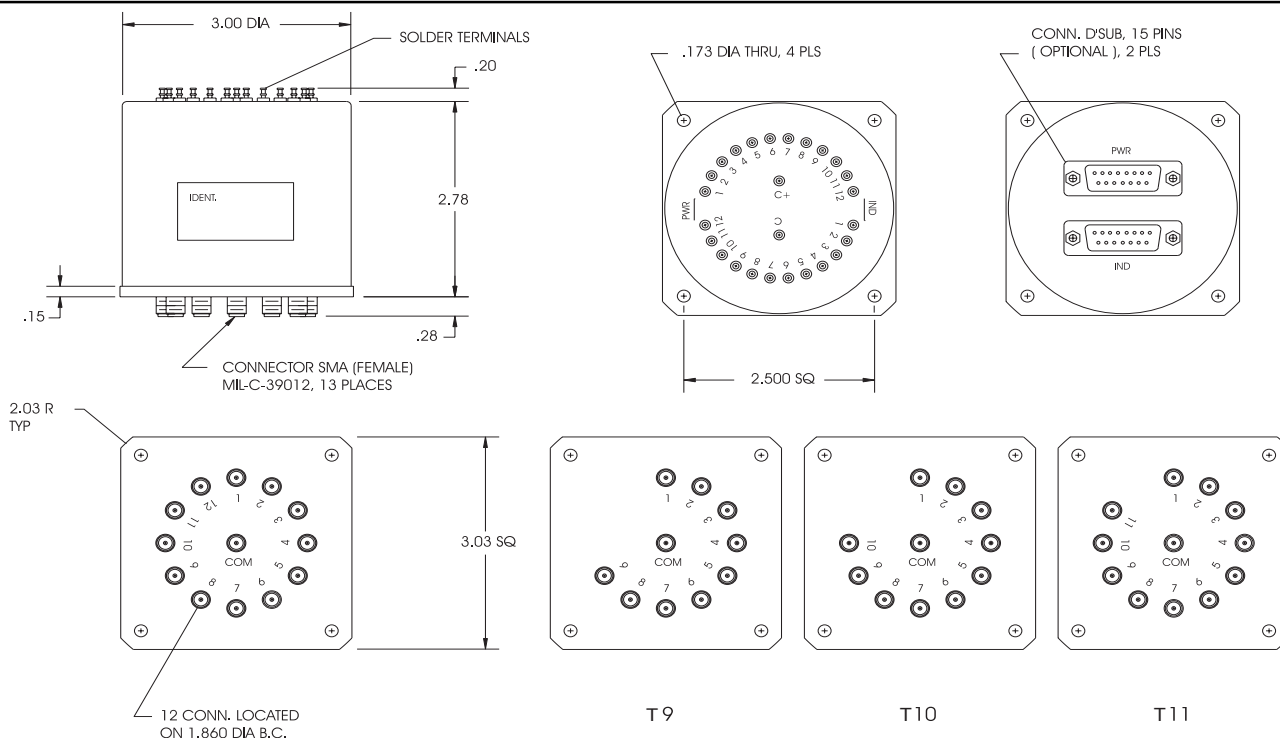

T9-T12 SERIES PART NUMBER & ORDERING INFORMATION

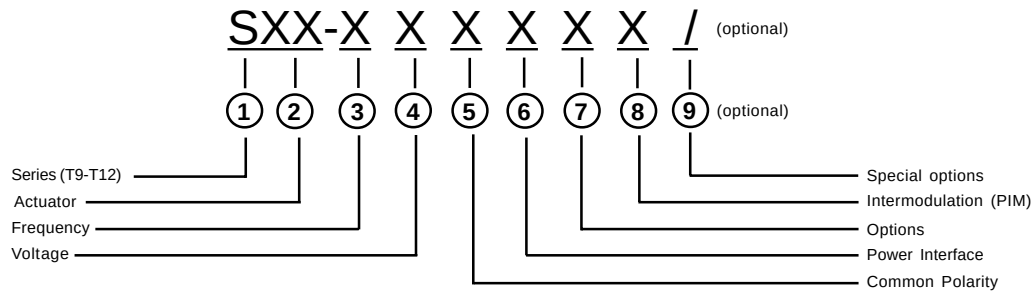**1 - Switch Series**

T9	SP9T TERMINATED SMA
T10	SP10T TERMINATED SMA
T11	SP11T TERMINATED SMA
T12	SP12T TERMINATED SMA

2 - Actuator

F	FAILSAFE	R	MOMENTARY
G	FAILSAFE WITH SUPPRESSION DIODE	S	MOMENTARY WITH SUPPRESSION DIODE
H	FAILSAFE WITH INDICATOR	T	MOMENTARY WITH INDICATOR
J	FAILSAFE WITH SUPPRESSION DIODE AND INDICATOR	U	MOMENTARY WITH SUPPRESSION DIODE AND INDICATOR
L	LATCHING	Y	OTHER (SPECIFY)
M	LATCHING WITH SUPPRESSION DIODE		
N	LATCHING WITH INDICATOR		
P	LATCHING WITH SUPPRESSION DIODE AND INDICATOR		

3 - Frequency Bandwidth

1	DC - 13.0 GHz	6	DC - 6.0 GHz
2	DC - 2.0 GHz	0	OTHER (SPECIFY)
3	DC - 12.4 GHz		
4	DC - 4.0 GHz		
9	DC - 15.0 GHz		

4 - Voltage

1	10 - 14 Vdc (12.0 NOMINAL)	4	24 - 32 Vdc (28.0 NOMINAL)
2	13 - 18 Vdc (15.0 NOMINAL)	5	OTHER
3	20 - 30 Vdc (24.0 NOMINAL)	0	NOT REQUIRED

5 - Common Polarity

1	POSITIVE (+) COMMON
2	NEGATIVE (-) OR RETURN Vdc COMMON
0	NOT REQUIRED

6 - Power Interface

1	SOLDER TERMINAL (TOP OF SWITCH)	5	D' SUB MINIATURE SERIES (TOP OF SWITCH)
3	CONN MS3112E-XX-XXP OR EQUIV. (TOP OF SWITCH)	8	OTHER

7 - Options

1	CUT OFF POWER CIRCUIT (LATCHING ONLY)	8	OTHER (SPECIFY)
2	TTL LOGIC	9	CUSTOM (ORDER)
3	CUT OFF PWR CIRCUIT & TTL LOGIC (LATCHING ONLY)	0	NO OTHER OPTIONS REQUIRED

8 - Intermodulation

7	LOW PASSIVE INTERMODULATION	9	ULTRA LOW PASSIVE INTERMODULATION
8	SUPERIOR PASSIVE INTERMODULATION	0	STANDARD SWITCH

9 - Special Options (optional - leave blank if not required)

/P	HIGH TEMP, HIGH POWER CONNECTOR
/MS	EXTENDED TEMP RANGE -54 DEG C TO + 90 DEG
/MSP	HIGH TEMP, HIGH POWER CONNECTOR AND EXTENDED TEMP RANGE