

1MHz-200MHz 10-Way 75Ω Power Divider

Wide Band Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *


Low Insertion loss and high isolation

Standard: MIL E-5400, MIL E -16400

10W forward power handling capability

*** 2W maximum input when work as combiner.**

Frequency Range (MHz) f _L f _H	Insertion Loss		Isolation			Phase Unbalance			Amplitude Unbalance		
	(dB)		(dB)			(degree)			(dB)		
	L M	U	L	M	U	L	M	U	L	M	U
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax
1-200	0.8 1.2	1.0 1.5	35 25	30 20	25 18	1.2	4	8	0.3	0.4	0.6

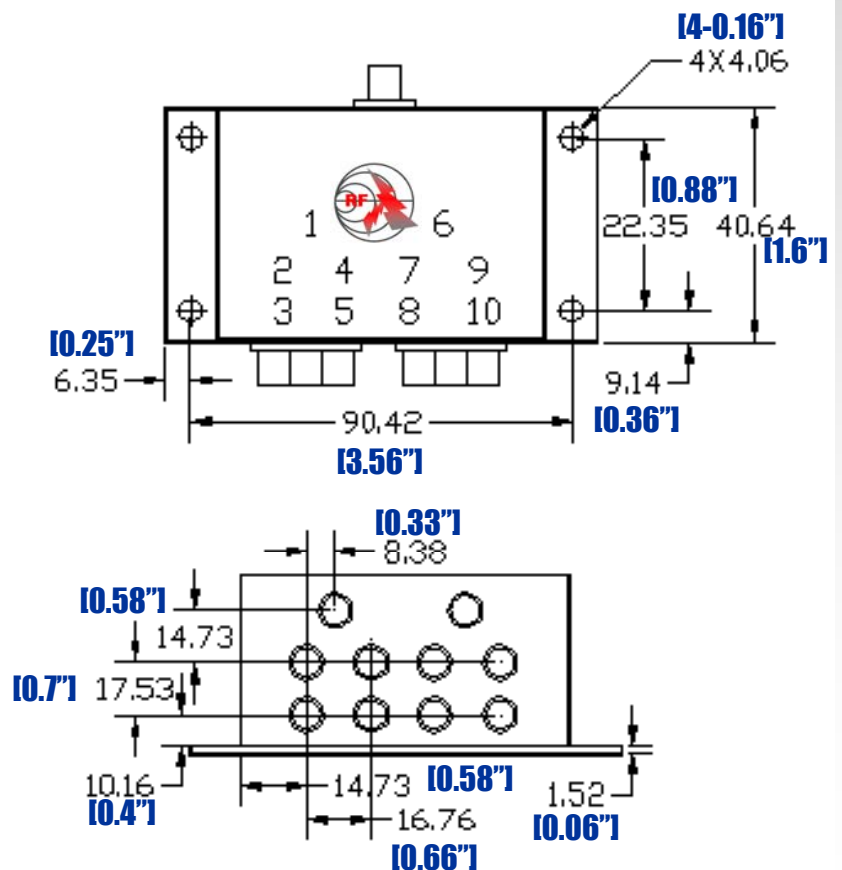

Notes:

- 1. Case material: Aluminum alloy with Nickel-plating.**
- 2. Connector: N/SMA/BNC/TNC...**
- 3. Temperature -40° C~+85° C**