


ELECTRICAL SPECIFICATION

1. Product Model: VCC-07010-1
2. Frequency Range: 0.700-1.000 GHz
3. ISOLATION (dB) Min: 17
4. INSERTION LOSS (dB) Max: 0.60
5. VSWR Max: 1.35
6. Operating Temperature (°C) : -10 TO +70
7. Finish: BLACK PAINT

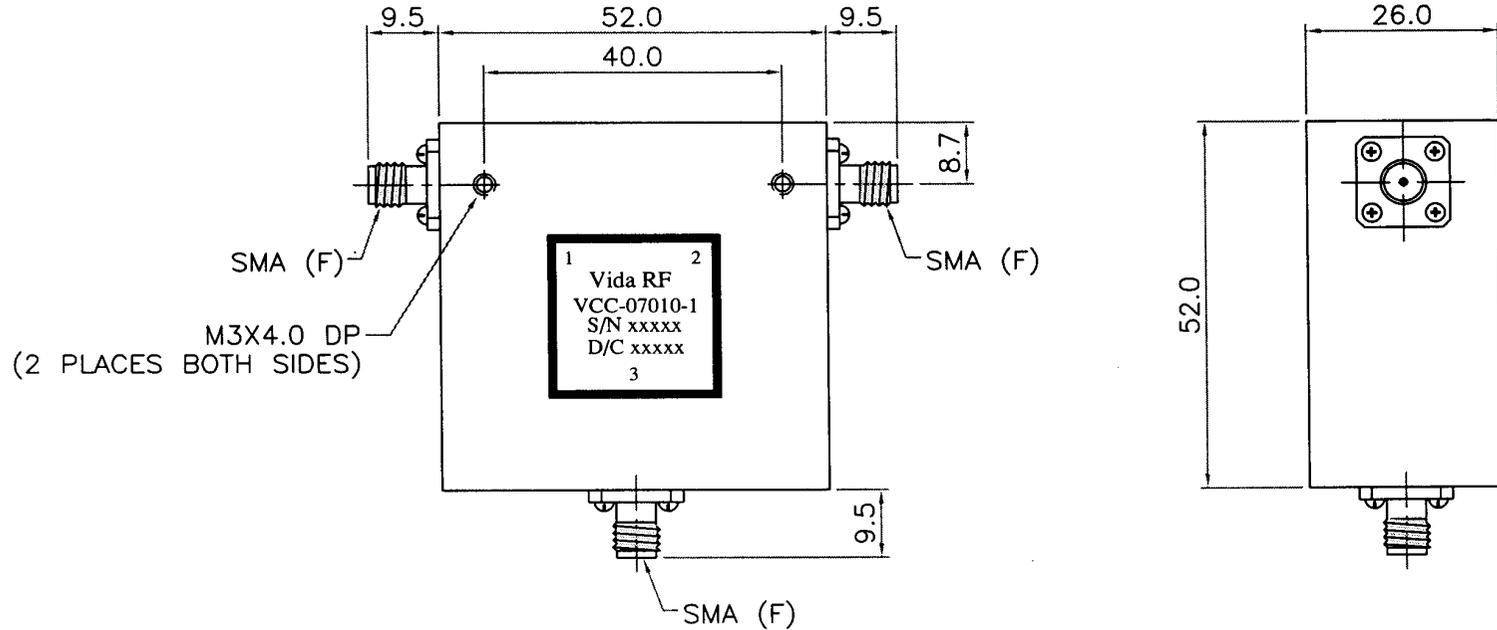

NOTE : Room Temp. +25°C AT Spec; 18/0.50/1.30
 Forward Power : 150 W
 Reverse Power : 150 W
 Direction : Clockwise
 RoHS Compliant

				Drawn: T. P 1/10/13	COAXIAL CIRCULATOR			
				Checked: D. H 1/10/13				
				Approved: S. K 1/10/13				
Description	Ecn.No	Date	Rev	Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Cage Code 6KQ83	Part No: VCC-07010-1	
 Tel:877-777-8432 www.vidaRF.com						View: 	Size: B4	Scale: 4:1