


| MECHANICAL CHARACTERISTICS | |
|--|--|
| INTERFACE | MIL-STD-348, FIGURE 310-1 |
| IN ACCORDANCE WITH THE INTENT OF SLANT SHEET | MIL-PRF-39012/56 REF. |
| RECOMMENDED MATING TORQUE | 9 IN-LBS. NOM. |
| COUPLING PROOF TORQUE | 15 IN-LBS. MIN. |
| COUPLING NUT RETENTION | 60 LBS. MIN. |
| FORCE TO ENGAGE | 2 IN-LBS. MAX. |
| FORCE TO DISENGAGE | 2 IN-LBS. MAX. |
| DURABILITY | 500 CYCLES MIN. |
| AXIAL CONTACT RETENTION (FROM INTERFACE) | 6 LBS. MIN. |
| AXIAL CONTACT RETENTION (FROM CABLE) | 6 LBS. MIN. |
| CABLE RETENTION | 10 LBS MIN. |
| MASS | 3.98 GRAMS NOM. |
| | |
| | |
| ELECTRICAL CHARACTERISTICS | |
| IMPEDANCE | 50 Ohms NOM. |
| MAXIMUM FREQUENCY | 6 GHz |
| VSWR DC - 6 GHz | 1.16:1 MAX. |
| INSERTION LOSS | 0.03 √F (GHz) dB MAX. |
| DIELECTRIC WITHSTANDING VOLTAGE | 1500 Vrms MIN. |
| INSULATION RESISTANCE | 5000 MegaOhms MIN. |
| RF LEAKAGE DC - 6 GHz | -90 dB MIN. |
| CORONA | 250 Vrms MIN. @ 70,000 FEET |
| RF HIGH POTENTIAL | 900 Vrms MIN. |
| CONTACT RESISTANCE (INNER) | 4.0 MilliOhms MAX. |
| CONTACT RESISTANCE (OUTER) | 2.0 MilliOhms MAX. |
| | |
| | |
| | |
| ENVIRONMENTAL CHARACTERISTICS | |
| OPERATING TEMPERATURE | -62°C TO 165°C |
| VIBRATION | MIL-STD-202, METHOD 204, CONDITION D |
| MECHANICAL SHOCK | MIL-STD-202, METHOD 213, CONDITION I |
| THERMAL SHOCK | MIL-STD-202, METHOD 107, CONDITION B |
| CORROSION | MIL-STD-202, METHOD 101, CONDITION B, 5% |
| MOISTURE RESISTANCE | MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION) |
| | |
| MATERIALS AND FINISH | |
| COUPLING NUT | STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967 |
| CONTACT | BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290 |
| BODY | STEEL, CORROSION RESISTANT PER ASTM-A-582, UNS NO. S30300, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290 |
| END CAP | BRASS, PER ASTM-B-36, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290 |
| SNAP RING | BERYLLIUM COPPER, PER ASTM-B-197 |
| INSULATOR & DIELECTRIC STOP | TFE FLUOROCARBON PER ASTM-D-1710 |
| GASKET | SILICONE RUBBER PER ZZ-R-765 |
| | |
| APPLICATION | |
| CABLE(S) | UFA147A |
| INSTALLATION | PER CONFIGURATOR |
| | |

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

| REV | DESCRIPTION | DATE | BY | APPVD | CHKD |
|-----|------------------------------|------------|-----|-------|------|
| A | INITIAL RELEASE - ECO 135496 | 10/15/2013 | MJM | RS | CCF |

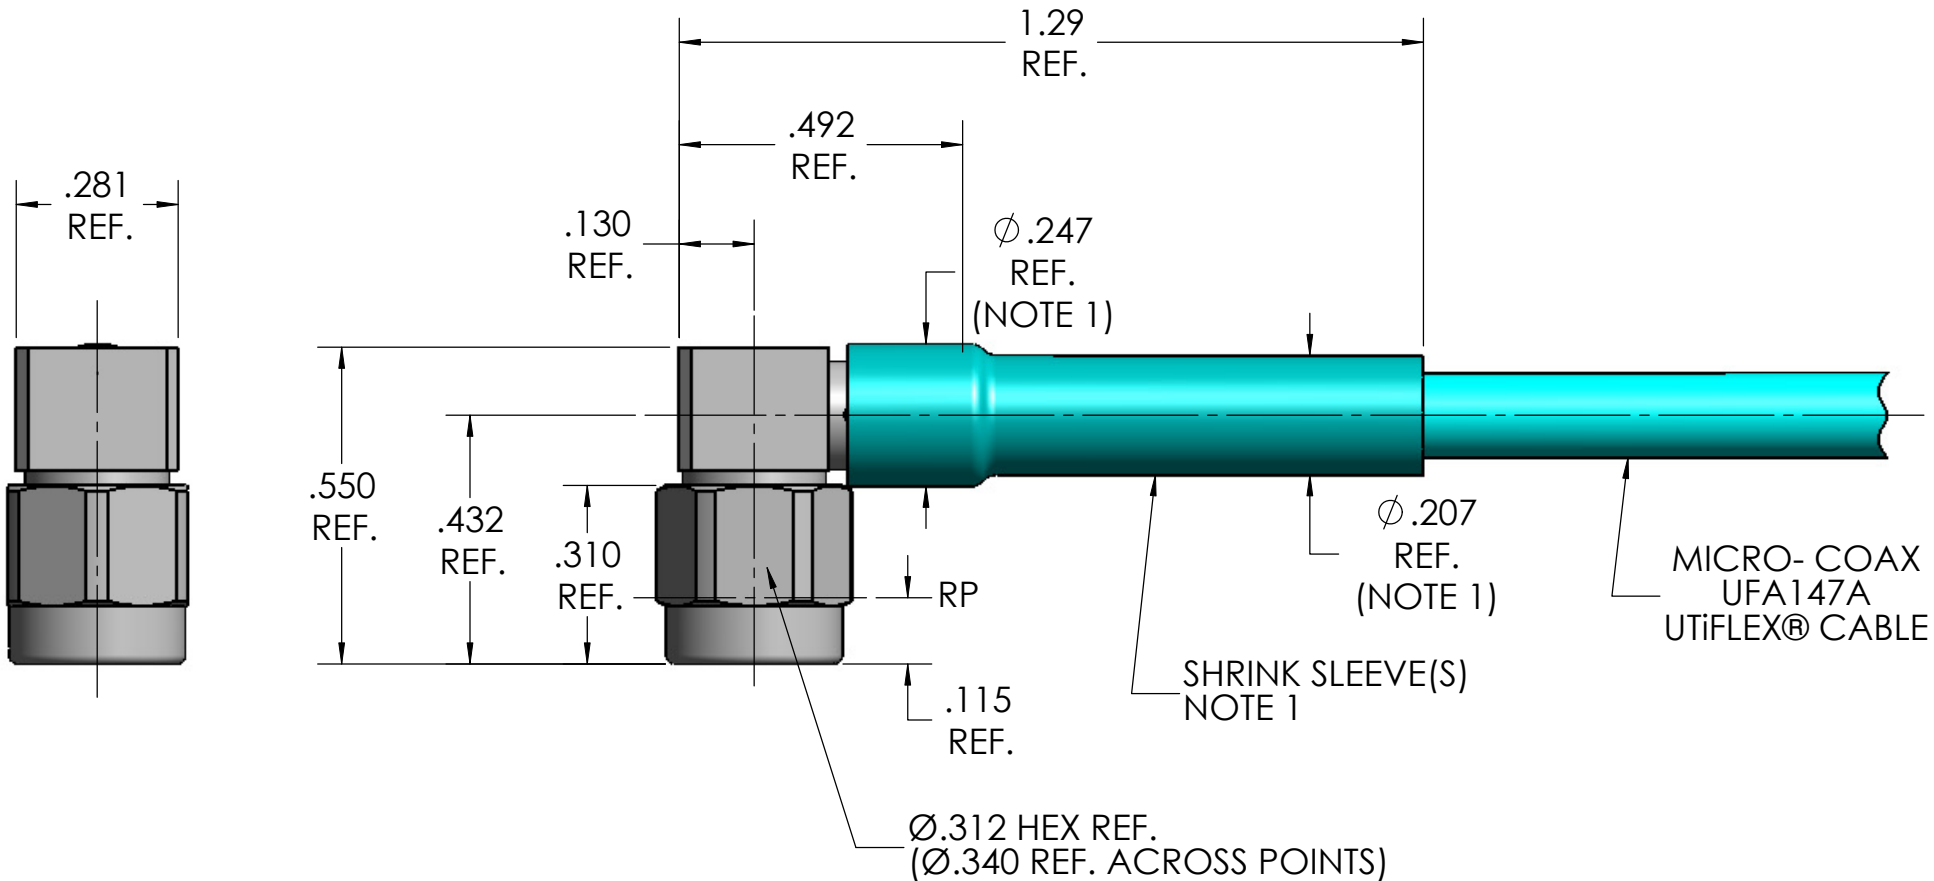

NOTES:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATION DRAWING

| | | | | | | | | | | | |
|---|---------|---|-----|----------|------|---|-----------|-------------|-----|--|--|
| THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC. | | INITIALS | | DATE | | <div>MICRO-COAX[®] Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.</div> | | | | | |
| | | DWN. | JMK | 10/15/03 | | | | | | | |
| | | CHKD. | RS | 3/15/10 | | | | | | | |
| | | APPVD. | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | TITLE | | | | | | | | | |
| | | SMA RIGHT ANGLE PLUG, UFA147A CABLE | | | | | | | | | |
| .XX | ± .02 | ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989. | | FSCM NO. | SIZE | SCALE | SHEET NO. | DRAWING NO. | REV | | |
| .XXX | ± .005 | | | 64639 | B | 3:1 | 1 OF 1 | SD904520 | A | | |
| .XXXX | ± .0010 | | | | | | | | | | |
| ANGLES | ±5° | | | | | | | | | | |