


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

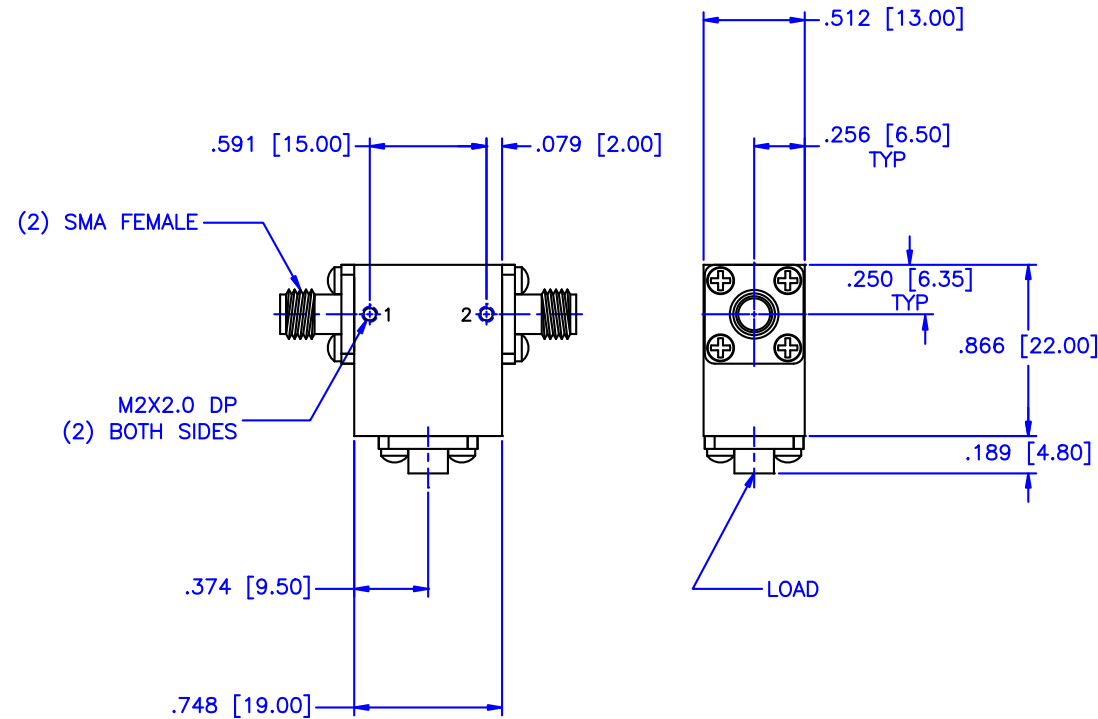

SPECIFICATIONS

Frequency Range: 6.5–13.0 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.7dB Max.
 VSWR: 1.35:1 Max.
 Power: 25 Watts AVG.
 Operating Temperature: –54°C to +85°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 12-02-2013		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-25	
APPROVED: T. Nguyen DATE: 12-02-2013		CAGE CODE: 0D2L5 SIZE: N/A REV: A DO NOT SCALE THE DRAWING		DWG NO. 82113	
				THIRD ANGLE PROJECTION 	