
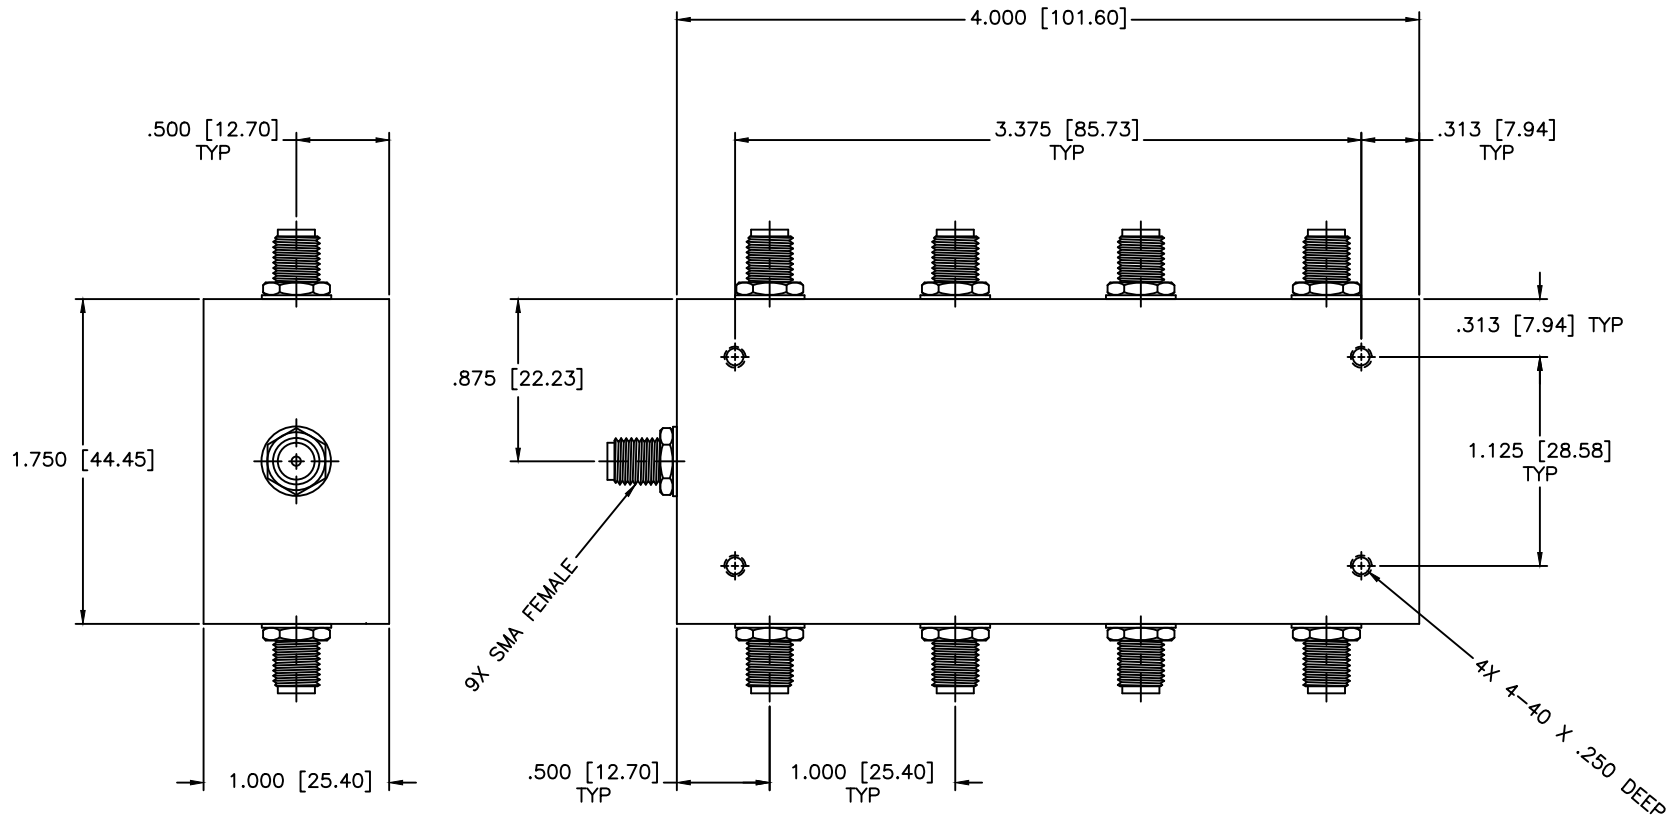


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

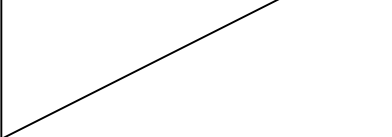

SPECIFICATIONS

Frequency Range: 5–500 MHz
Isolation: 25dB Min.
VSWR: 1.30:1 Max.
Insertion Loss: 1.6dB Max.
Amplitude Balance: ± 0.3 dB Max.
Phase Balance: ± 5 Deg. Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY POWER DIVIDER			
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PL8-2			
DRAWN: Paiboon Luekhamhan		DATE: 02-28-2008		CASE CODE: OD2L5		SIZE: N/A DO NOT SCALE THE DRAWING	
APPROVED: T. Nguyen		DATE: 02-28-2008		REV: A DWG NO. 83069		