


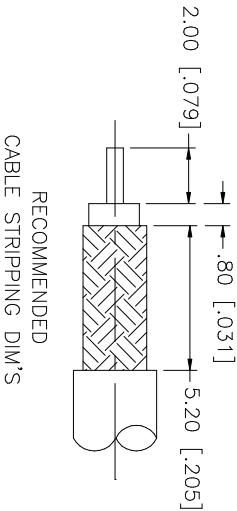
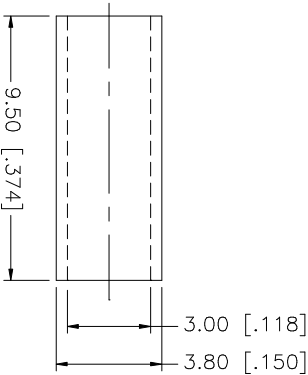


REV.	DATE	DESCRIPTION
NC	03/20/03	INITIAL RELEASE

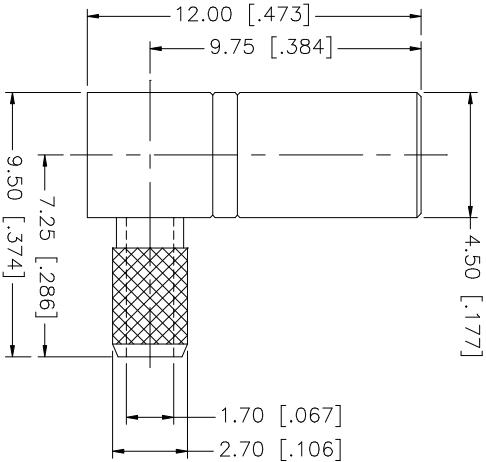

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CENTER CONTACT TO SOLDER

9					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/143/143102.DWG	Amphenol Connex SSMB R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE) 143102							
8															
7	FERRULE	COPPER	GOLD	1								DRAWN	G.R.S.	03/20/03	DATE
6	COVER	BRASS	GOLD	1								CHECKED			
5	INSULATOR	TEFLON	NATURAL	1								ISSUED			
4	SHELL	BRASS	GOLD	1	SHEET 1 OF 1										
3	INSULATOR	TEFLON	NATURAL	1	PART NO.										
2	CONTACT PIN	BER. COPPER	GOLD	1	PART NO.										
1	HOUSING/BODY	BRASS	GOLD	1	PART NO.										
DESCRIPTION					MATERIAL	FINISH	QTY								

Amphenol Connex