




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

剥线尺寸
stripping dimensions

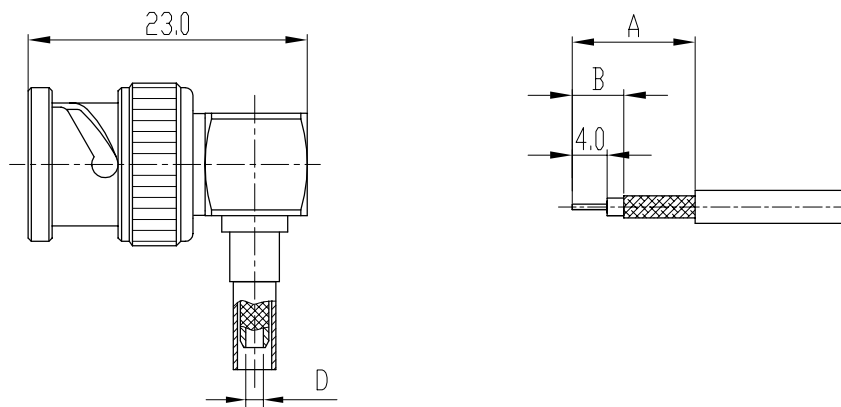

产品型号 type	电缆型号 cable type	A	B	D	L
BNC-JW3Y	SFF-50-1.5-1、RG316/U	16.5	6.5	Ø1.6	20.6
BNC-JW4Y	SFF-50-2-1	16.5	6.5	Ø2.3	24.0
BNC-JW5Y	SFF-50-3-1、RG141A/U	18.0	9.5	Ø3.1	26.0
BNC-JW5Y-1	SFF-50-3-2、RG142B/U、RG223/U	18.0	9.5	Ø3.1	26.0

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 1.5\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 1.5\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: MIL-C-39012/16E

执行标准: MIL-C-39012/16E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body: brass, nickel plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体和: 黄铜, 镀镍
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

	SCALE	
	1.5:1	
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

BNC-JW3Y
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.