



ISSUE 1; August 2014 - RoHS 2011/65/EU

Description

- Voltage controlled crystal oscillator in a ceramic package with a hermetically sealed metal lid

Frequency Parameters

- Frequency 1.0MHz to 79.0MHz
- Frequency Stability $\pm 20.00\text{ppm}$ to $\pm 50.00\text{ppm}$
- Ageing (@ 25°C): $\pm 3\text{ppm}$ max

Electrical Parameters

- Supply Voltage 3.3V $\pm 5\%$

Frequency Adjustment

- Pulling $\pm 150\text{ppm}$ min
- Control Voltage 1.65V $\pm 1.65\text{V}$
- Input Impedance 100k Ω min
- Linearity: $\pm 10\%$ max

Operating Temperature Ranges

- 0 to 70°C
- -40 to 85°C

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF max
- Start Up Time: 10ms max

Output Control

- Standby Operation:
Logic '1' (>70% Vs) to pad 2 enables oscillator output
Logic '0' (<30% Vs) to pad 2 disables oscillator output: when disabled the oscillator output goes to the high impedance state
No connection pad 2 enables oscillator output

Output Levels


- VoH: >90% of Vs
- VoL: <10% of Vs

Noise Parameters



- Period Jitter (pk-pk): 100ps max
- Period Jitter (one sigma): 25ps max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Drop: 1.2m drop (3 times) onto a hard surface
- Vibration: 1.5mm amplitude, 10-55-10Hz, full sine wave, 2mins in 3 mutually perpendicular planes, duration 2hrs in each plane

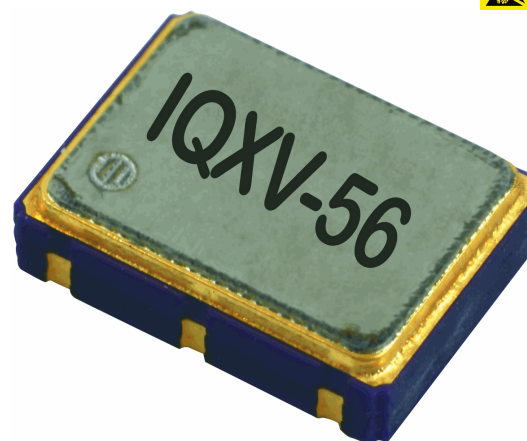


Outline (mm)




Underside View

- Pad Connections
1. Voltage Control
 2. Standby Operation
 3. GND
 4. Output
 5. N/C
 6. +Vs

Solder Pad Layout



Typical Phase Noise Plot @ 77.76MHz

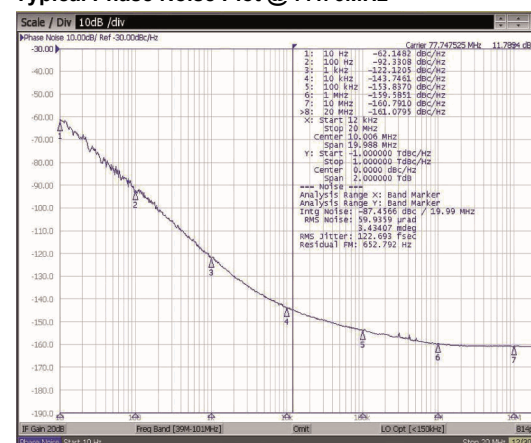

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

**Ordering Information**

- Frequency*
- Model*
- Output
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Supply Voltage
- Pullability
- (*minimum required)
- Example
- 10.0MHz IQXV-56
- HCMOS ± 50 ppm -40 to 85C 3.3V ± 150 ppm min

Compliance

- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
- Pack Size: 1,000
- Pack Style: Bulk Loose in bulk pack
- Pack Size: 1

Electrical Specification - maximum limiting values 3.3V $\pm 5\%$

Frequency Min	Frequency Max	Temperature Range	Stability (min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	20.0MHz	0 to 70	± 20.0	10	10	45/55
		-40 to 85	± 25.0	10	10	45/55
20.000001MHz	40.0MHz	0 to 70	± 20.0	15	8	45/55
		-40 to 85	± 25.0	15	8	45/55
40.000001MHz	79.0MHz	0 to 70	± 20.0	25	5	45/55
		-40 to 85	± 25.0	25	5	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com