


DWG. NO.

REV



ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

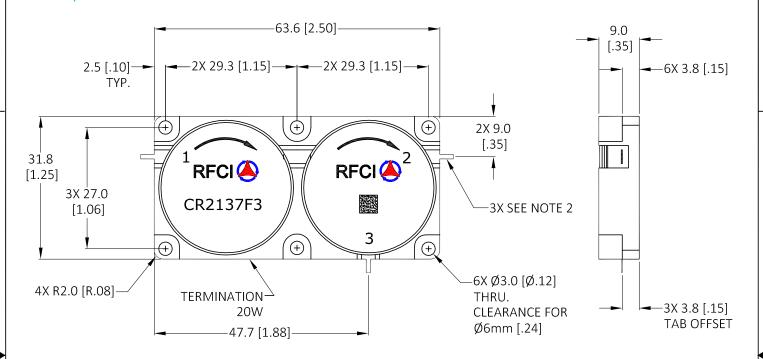

Specifications

Parameter	Minimum	Typical	Maximum	
Frequency Range (N	791		821	
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25	
Return Loss (dB)	22	> 25		
FWD IMD: 2T at 37 5MHz Spacing		75		

Power & Temperature Ratings

Maximum			
1000/200 Watts			
200 Watts			
-40 to +85° C			
-40 to +95° C			

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL; CR2137F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:		THIRD ANGLE PROJECTION								
1 PLACE DECIMAL ±.2 [±.01] 2 PLACE DECIMAL ±.10 [±.004]	ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPROV	ALS	DATE		R	FCI			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5		DRAWN BY:	HV	04/19/13						
		CHECKED BY:	P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFC!) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFC! TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFC! OFFICIAL."		DESIGN BY:	P.T	04/01/13	OUTLINE/SPECS					
		ENGINEER BY:	P.T	04/01/13						
		MFG. ENGR.	L.T	4/21/13	SIZE	CAGE NO.	DWG NO.			BEV.
		Q.A.	A.			2137F3-OS 1		1		
		PROG. MGMT/MKT			τ	A	ChZi	3/F3	5-05	•
DO NOT SCALE	DRAWING				SCAL	E: FULL			SHEET 1 OF 1	
				A				•		