
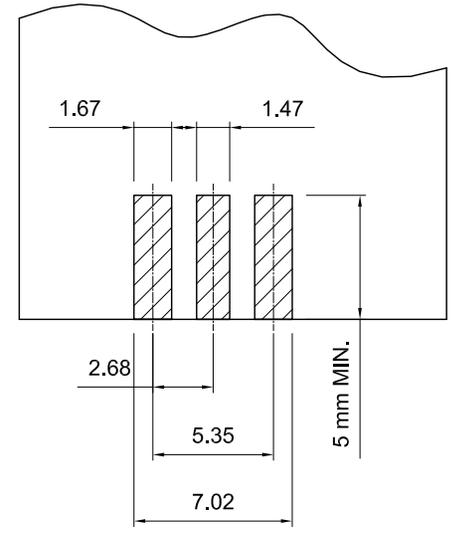
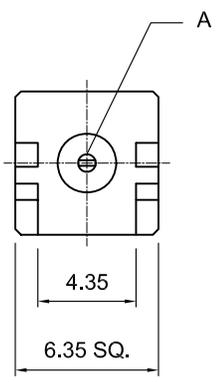
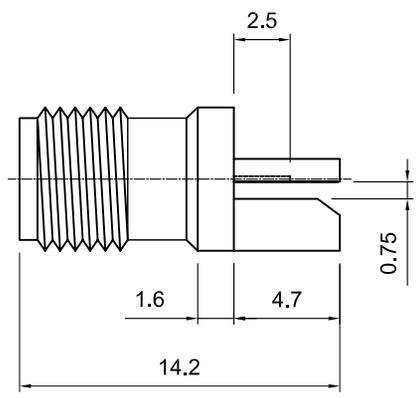



**Tolerances**  
 1-20=+/-0.2  
 20-30=+/-0.3  
 30-40=+/-0.4  
 40-50=+/-0.5  
 50-100=+/-0.75  
 100-300=+/-1.5  
 Angles=+/-1  
**Dimensions are in Millimeters**

Revisions Description/Approved/Date	Approved M.H.	Date 08/15/02
	Checked M.H.	Date 08/15/02
	Drawn M.D.L.	Date 08/15/02
NOTES (plating thickness in micro-inches):		
1. Per QQ-B-626	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	6. Per ZZ-R-765	10. Per QQ-P-35
3. Per QQ-C-530	7. Per WW-T-799	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	

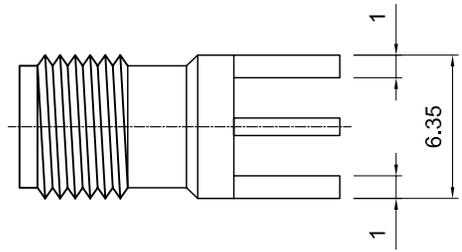

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: F	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule		
Gasket		
Hex Nut		
Lock Washer		

**Lighthouse Technologies, Inc.**  
 5640 Kearny Mesa Road, Suite N  
 San Diego, California 92111  
 Part Number:  
**LTI-SASRF75ZGT-3**

Description SMA reverse polarity end launch PCB jack with tab terminaion.		
Gold plated brass body, Teflon dielectric.		
Scale 1:1	Drawing No. SASRF75Z-3	File Name SASRF75Z-3