


Electrical Specification ($T_A=25^{\circ}\text{C}$)


Parameter	Unit	Min	Typ	Max	Test condition	Parameter	Unit	Min	Typ	Max	Test condition
Frequency range	MHz	--	4700	--	$V_T: 1\sim 11\text{V}$	Pushing	MHz/V	--	0.2	--	$V_{CC}: 8.45\sim 9.55\text{V}$
Tuning voltage	V	1	--	11	--	Tuning port capacitance	pF	--	10	--	--
Tuning sensitivity	MHz/V	--	1.5	--	4700MHz	Input impedance	$\text{M}\Omega$	--	10	--	--
Power output	dBm	10	--	--	4700MHz	Output impedance	Ω	--	50	--	--
Output power vibration vs. Temp	dB	--	3	--	$-40^{\circ}\text{C}\sim +70^{\circ}\text{C}$	Frequency drift	MHz	--	1.5	3	$-40^{\circ}\text{C}\sim +70^{\circ}\text{C}$
Phase noise SSB At offset frequency	dBc/Hz	--	-113	--	fm=10KHz	DC voltage	V	8.55	9	9.45	--
		--	-135	--	fm=100KHz	DC current	mA	--	65	85	--
Harmonic	dBc	--	--	-20	4700MHz	Operating temp range	$^{\circ}\text{C}$	-40	--	+70	--
Spurious	dBc	--	--	-70	4700MHz	Storage temp range	$^{\circ}\text{C}$	-55	--	+85	--

Typical performance

a. Frequency, output power, current
Tuning sensitivity

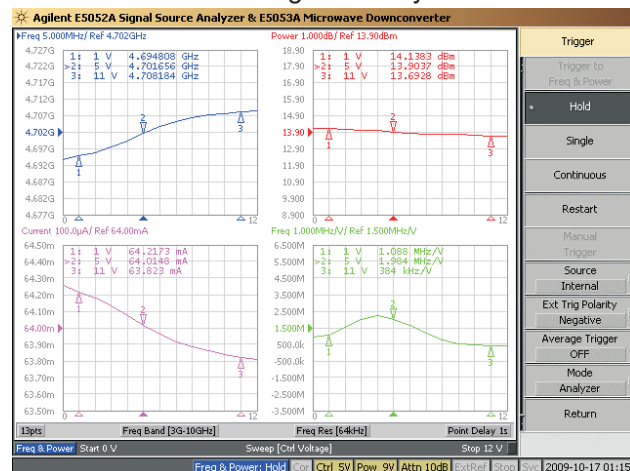

b. Phase noise

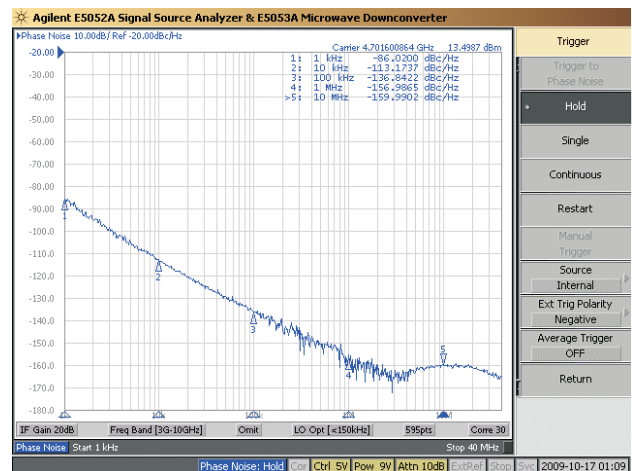

Absolute Ratings

Power Voltage	11V
Max Tuning Voltage	15V
Min Tuning Voltage	-0.7V

